

日立照明器具 照明特性

形式： HNM4203V-MEU14 ＜高出力形＞	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
	室指数	照明率 S/H=1.0														
	0.6	0.46	0.34	0.27	0.44	0.33	0.26	0.22	0.31	0.25	0.21	0.29	0.23	0.20	0.17	
	0.8	0.54	0.43	0.35	0.51	0.41	0.34	0.29	0.38	0.32	0.27	0.35	0.30	0.26	0.22	
	1	0.59	0.48	0.41	0.56	0.47	0.40	0.34	0.43	0.37	0.32	0.40	0.35	0.31	0.27	
	1.25	0.64	0.54	0.47	0.61	0.52	0.45	0.40	0.48	0.42	0.38	0.45	0.40	0.36	0.31	
	1.5	0.68	0.59	0.52	0.65	0.57	0.50	0.45	0.52	0.47	0.42	0.48	0.44	0.40	0.35	
	2	0.73	0.65	0.59	0.70	0.63	0.57	0.52	0.58	0.53	0.49	0.54	0.50	0.46	0.41	
	2.5	0.76	0.69	0.63	0.73	0.67	0.61	0.57	0.62	0.57	0.53	0.57	0.54	0.50	0.45	
	3	0.79	0.72	0.67	0.75	0.70	0.65	0.60	0.65	0.61	0.57	0.60	0.57	0.53	0.47	
	4	0.82	0.77	0.72	0.78	0.74	0.70	0.66	0.69	0.65	0.62	0.64	0.61	0.58	0.52	
光源	4	0.82	0.77	0.72	0.78	0.74	0.70	0.66	0.69	0.65	0.62	0.64	0.61	0.58	0.52	
品名	Hf蛍光ランプ	5	0.84	0.79	0.75	0.81	0.77	0.73	0.70	0.71	0.68	0.65	0.66	0.64	0.61	0.55
形式	FHF32EX-N-H	7	0.86	0.83	0.80	0.83	0.80	0.77	0.75	0.75	0.72	0.70	0.70	0.68	0.66	0.59
光束	9,900 lm	10	0.88	0.86	0.84	0.85	0.83	0.81	0.79	0.78	0.76	0.74	0.72	0.71	0.70	0.63

器具効率 $F_t = 89.3\%$
 上方光束 $F_u = 17.3\%$
 下方光束 $F_d = 72.0\%$

配光分類

BZ-

最大取付間隔

A-A 1.46 H


B-B 1.24 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	180	180	180
10	178	175	178
20	175	166	171
30	172	149	161
40	165	127	148
50	152	105	135
60	145	77	113
70	143	47	100
80	119	19	87
90	80		53
100	72		43
110	62		39
120	57		41
130	56		28
140	36		13
150	13		1
160			
170			
180			

単体照度分布(初期)

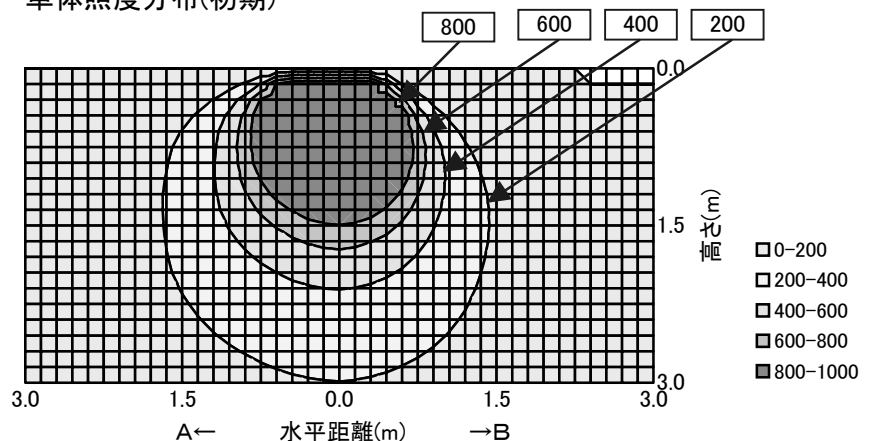

配光曲線

