



日立照明器具 照明特性


形式: HNM4205V-MEU14		天井	80%			70%				50%			30%			0%	
<高出力形>		反射率	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%														
		室指数	照明率 S/H=1.0														
姿図 		0.6	0.46	0.34	0.27	0.44	0.33	0.26	0.22	0.31	0.25	0.20	0.29	0.23	0.19	0.17	
		0.8	0.54	0.43	0.35	0.51	0.41	0.34	0.29	0.38	0.32	0.27	0.35	0.30	0.26	0.22	
		1	0.59	0.49	0.41	0.57	0.47	0.40	0.34	0.43	0.37	0.32	0.40	0.35	0.31	0.27	
		1.25	0.64	0.54	0.47	0.62	0.52	0.45	0.40	0.49	0.43	0.38	0.45	0.40	0.36	0.31	
		1.5	0.68	0.59	0.52	0.65	0.57	0.50	0.45	0.53	0.47	0.42	0.49	0.44	0.40	0.35	
		2	0.74	0.66	0.59	0.71	0.63	0.57	0.52	0.59	0.54	0.49	0.54	0.50	0.46	0.41	
		2.5	0.77	0.70	0.64	0.74	0.67	0.62	0.57	0.63	0.58	0.54	0.58	0.54	0.51	0.45	
		3	0.79	0.73	0.67	0.76	0.70	0.65	0.61	0.65	0.61	0.57	0.61	0.57	0.54	0.48	
光源		4	0.82	0.77	0.72	0.79	0.74	0.70	0.66	0.69	0.66	0.63	0.64	0.62	0.59	0.53	
品名	Hf蛍光ランプ	5	0.84	0.80	0.76	0.81	0.77	0.74	0.70	0.72	0.69	0.66	0.67	0.65	0.62	0.56	
形式	FHF32EX-N-K	7	0.87	0.84	0.81	0.84	0.81	0.78	0.75	0.76	0.73	0.71	0.71	0.69	0.67	0.60	
光束	9,600 lm	10	0.89	0.87	0.84	0.86	0.84	0.82	0.80	0.79	0.77	0.75	0.73	0.72	0.71	0.64	

器具効率 Ft= 90.2%			
上方光束 Fu= 16.7%			
下方光束 Fd= 73.5%			
配光分類			
BZ-			
最大取付間隔			
A-A		1.52	H
B-B		1.24	H
保守率	良	0.76	
	中	0.69	
	否	0.61	
光度 (cd/1000 lm)			
	A-0	B-B	C-0
0	176	176	176
10	176	172	174
20	174	163	169
30	173	147	159
40	171	125	149
50	165	100	139
60	153	73	123
70	147	43	104
80	124	17	91
90	84		55
100	75		45
110	64		43
120	62		35
130	46		20
140	25		8
150	7		
160		1	1
170	1	1	1
180			

単体照度分布(初期)

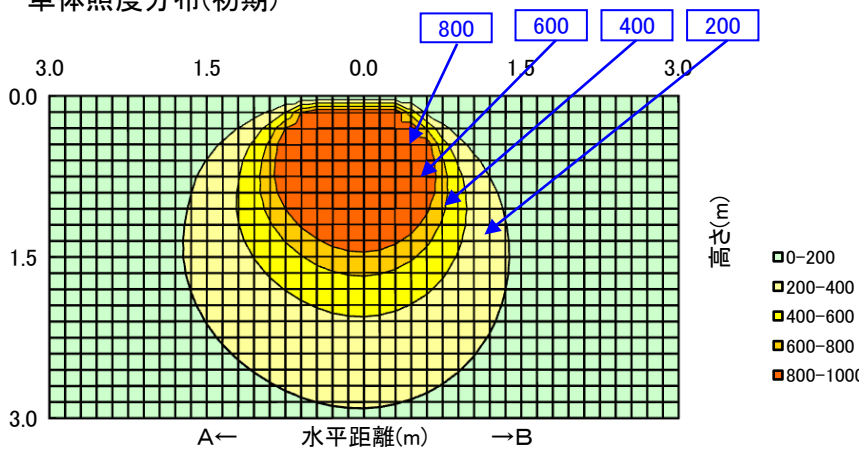

配光曲線

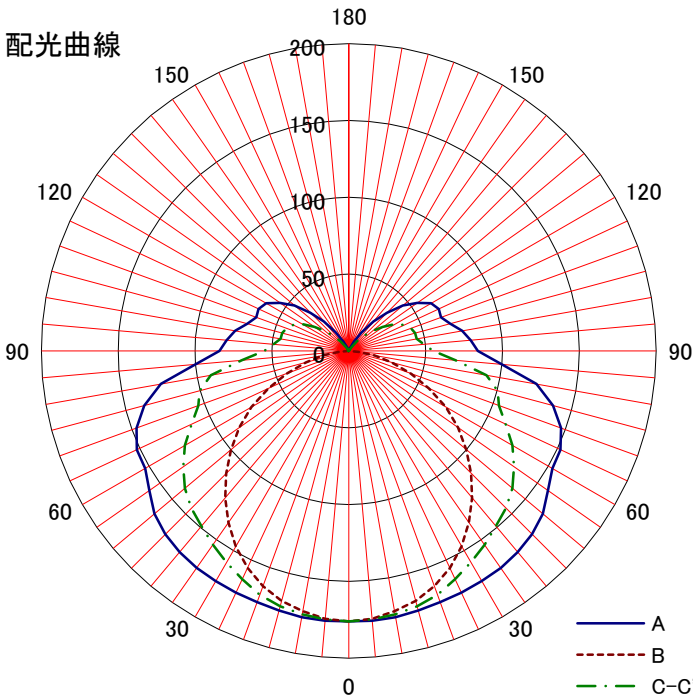

HNM4205V-MEU14(R1)