

日立照明器具 照明特性

形式：HNM4213-EU14		反 射 率	天井	80%			70%				50%			30%			0%		
<高出力形>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図 		0.6	0.45	0.36	0.30	0.44	0.35	0.30	0.26	0.34	0.29	0.26	0.32	0.28	0.25	0.23			
		0.8	0.53	0.44	0.38	0.51	0.43	0.38	0.34	0.41	0.37	0.33	0.40	0.35	0.32	0.30			
		1	0.57	0.50	0.44	0.56	0.49	0.43	0.40	0.46	0.42	0.39	0.44	0.41	0.37	0.35			
		1.25	0.62	0.55	0.50	0.60	0.54	0.49	0.45	0.51	0.47	0.44	0.49	0.45	0.42	0.40			
		1.5	0.65	0.59	0.54	0.63	0.58	0.53	0.49	0.55	0.51	0.48	0.52	0.49	0.47	0.43			
		2	0.69	0.64	0.60	0.67	0.63	0.59	0.55	0.60	0.56	0.54	0.57	0.54	0.52	0.49			
		2.5	0.72	0.67	0.63	0.70	0.66	0.62	0.59	0.63	0.60	0.57	0.60	0.57	0.55	0.52			
		3	0.73	0.69	0.66	0.71	0.68	0.65	0.62	0.65	0.62	0.60	0.62	0.59	0.58	0.54			
光 源		4	0.75	0.72	0.69	0.73	0.70	0.68	0.66	0.67	0.65	0.63	0.64	0.62	0.61	0.57			
品名	Hf蛍光ランプ	5	0.77	0.74	0.72	0.75	0.72	0.70	0.68	0.69	0.67	0.66	0.66	0.64	0.63	0.59			
形式	FHF32EX-N-H	7	0.78	0.77	0.75	0.77	0.75	0.73	0.72	0.72	0.70	0.69	0.68	0.67	0.66	0.62			
光束	9,900 lm	10	0.80	0.79	0.77	0.78	0.77	0.76	0.75	0.73	0.73	0.72	0.70	0.69	0.69	0.64			

器具効率 $F_t=$ 77.6%
 上方光束 $F_u=$ 8.8%
 下方光束 $F_d=$ 68.8%

配光分類

BZ-

最大取付間隔

A-A 1.34 H

B-B 1.30 H

保守率


良
中
否

0.74
0.70
0.62

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	251	251	251
10	248	248	248
20	242	237	239
30	227	218	222
40	193	193	199
50	130	162	157
60	57	125	93
70	22	83	31
80	20	34	13
90	25	1	17
100	32	1	22
110	34	1	24
120	33	2	21
130	28	2	12
140	15	2	5
150	5	2	2
160	2	2	2
170	2	2	2
180	2	2	2

単体照度分布(初期)

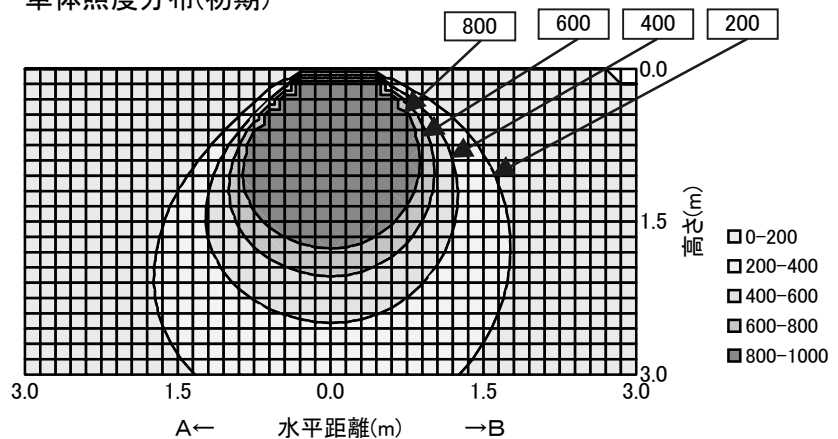

配光曲線

