


日立照明器具 照明特性

形式: HNM4251-EU14		天井	80%			70%				50%			30%			0%
<高出力形>		反射率	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		壁	10%													
		床	0%													
		室指数	照明率 S/H=1.0													
姿図 	光源	0.6	0.43	0.32	0.25	0.41	0.31	0.25	0.20	0.29	0.23	0.19	0.26	0.21	0.18	0.15
		0.8	0.51	0.40	0.33	0.48	0.38	0.32	0.27	0.35	0.29	0.25	0.32	0.27	0.24	0.20
		1	0.56	0.46	0.38	0.53	0.44	0.37	0.32	0.40	0.34	0.30	0.37	0.32	0.28	0.24
		1.25	0.61	0.51	0.44	0.58	0.49	0.43	0.38	0.45	0.40	0.35	0.41	0.37	0.33	0.28
		1.5	0.64	0.56	0.49	0.61	0.53	0.47	0.42	0.49	0.44	0.40	0.45	0.41	0.37	0.32
		2	0.69	0.62	0.56	0.66	0.59	0.54	0.49	0.54	0.50	0.46	0.50	0.46	0.43	0.37
		2.5	0.72	0.66	0.60	0.69	0.63	0.58	0.54	0.58	0.54	0.50	0.53	0.50	0.47	0.41
		3	0.75	0.69	0.64	0.71	0.66	0.61	0.57	0.61	0.57	0.53	0.56	0.53	0.50	0.43
		4	0.78	0.73	0.68	0.74	0.70	0.66	0.62	0.64	0.61	0.58	0.59	0.57	0.54	0.47
		5	0.79	0.75	0.72	0.76	0.72	0.69	0.66	0.67	0.64	0.62	0.62	0.59	0.57	0.50
品名	Hf蛍光灯	7	0.82	0.79	0.76	0.79	0.76	0.73	0.71	0.70	0.68	0.66	0.65	0.63	0.61	0.54
形式	FHF32EX-N-H	10	0.84	0.82	0.79	0.81	0.79	0.77	0.75	0.73	0.71	0.70	0.67	0.66	0.65	0.57
光束	9,900 lm															

器具効率 $F_t = 85.4\%$
 上方光束 $F_u = 19.3\%$
 下方光束 $F_d = 66.1\%$

配光分類
BZ-


最大取付間隔
 A-A 1.54 H
 B-B 1.26 H

保守率
 良 0.74
 中 0.70
 否 0.62

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	155	155	155
10	154	154	153
20	155	145	149
30	156	131	143
40	155	113	135
50	151	92	125
60	143	66	112
70	130	40	100
80	100	15	77
90	79	1	53
100	84		57
110	83		47
120	60		44
130	58		26
140	32		9
150	9		1
160			
170			
180			

単体照度分布(初期)

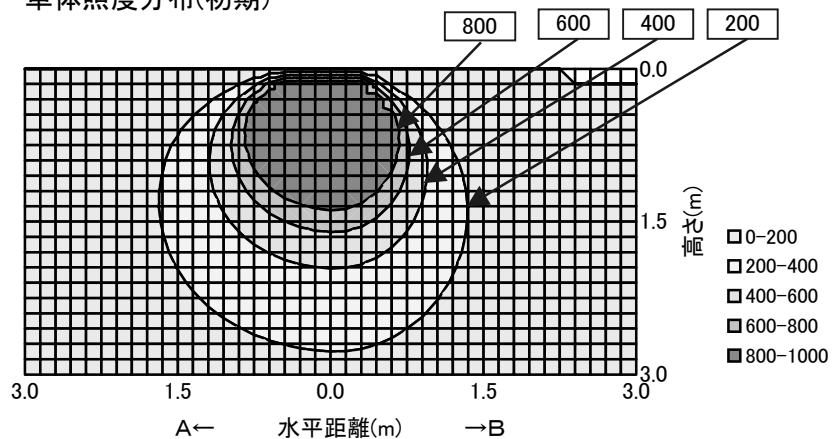

配光曲線

