

日立照明器具 照明特性

形式： HNM45401A-EX24		反 射 率	天井	80%			70%				50%			30%			0%		
＜定格出力形＞ ＜連続調光形＞			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図 		0.6	0.45	0.35	0.29	0.44	0.35	0.29	0.25	0.34	0.29	0.25	0.33	0.29	0.25	0.24			
		0.8	0.52	0.43	0.38	0.51	0.43	0.37	0.33	0.42	0.37	0.33	0.41	0.36	0.33	0.31			
		1	0.57	0.49	0.43	0.56	0.49	0.43	0.39	0.47	0.42	0.39	0.46	0.42	0.38	0.37			
		1.25	0.62	0.55	0.49	0.61	0.54	0.49	0.45	0.53	0.48	0.45	0.51	0.47	0.44	0.42			
		1.5	0.66	0.59	0.54	0.64	0.58	0.54	0.50	0.57	0.53	0.49	0.55	0.52	0.49	0.47			
		2	0.70	0.65	0.60	0.69	0.64	0.60	0.56	0.62	0.59	0.56	0.61	0.58	0.55	0.53			
		2.5	0.72	0.68	0.64	0.71	0.67	0.64	0.60	0.66	0.62	0.60	0.64	0.61	0.59	0.57			
		3	0.74	0.70	0.67	0.73	0.69	0.66	0.63	0.68	0.65	0.63	0.66	0.64	0.62	0.60			
		光源		4	0.76	0.73	0.71	0.75	0.72	0.70	0.68	0.71	0.69	0.67	0.69	0.67	0.66	0.64	
品名	コンパクト形Hf蛍光ランプ	5	0.78	0.75	0.73	0.77	0.75	0.72	0.70	0.73	0.71	0.69	0.71	0.70	0.68	0.66			
形式	FHP45EN	7	0.80	0.78	0.76	0.79	0.77	0.75	0.74	0.75	0.74	0.73	0.74	0.73	0.72	0.69			
光束	17,400 lm	10	0.81	0.80	0.79	0.80	0.79	0.78	0.77	0.77	0.76	0.76	0.76	0.75	0.74	0.72			

器具効率 $F_t = 76.8\%$
 上方光束 $F_u = 0.0\%$
 下方光束 $F_d = 76.8\%$

配光分類

BZ-

最大取付間隔

A-A 1.44 H


B-B 1.26 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	252	252	252
10	250	248	250
20	248	235	243
30	241	212	229
40	222	184	211
50	184	146	180
60	128	112	142
70	60	70	75
80	6	22	11
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

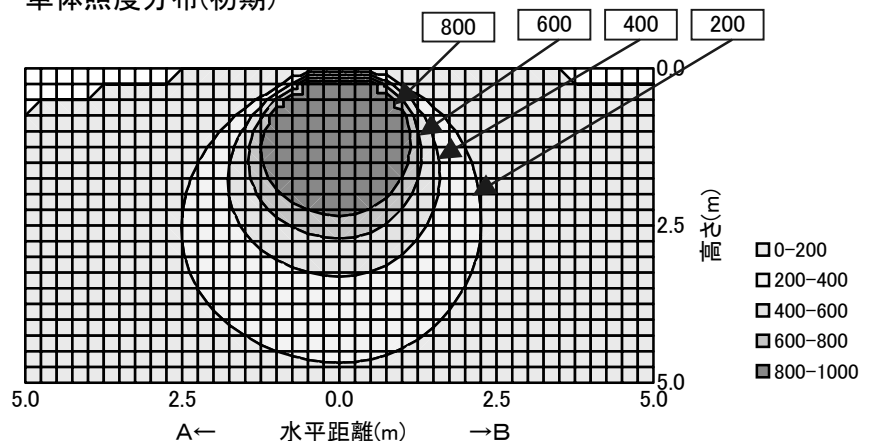

配光曲線

