


日立照明器具 照明特性

形式：HP4401-EX200	反 射 率	天井	80%			70%				50%			30%			0%
＜連続調光形＞		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
		室指数	照明率 S/H=1.0													
	0.6	0.40	0.31	0.25	0.39	0.30	0.24	0.20	0.28	0.23	0.20	0.27	0.22	0.19	0.17	
	0.8	0.48	0.39	0.33	0.46	0.38	0.32	0.28	0.36	0.31	0.27	0.34	0.30	0.26	0.24	
	1	0.53	0.45	0.39	0.51	0.43	0.38	0.34	0.41	0.36	0.32	0.39	0.35	0.31	0.29	
	1.25	0.57	0.50	0.44	0.55	0.48	0.43	0.39	0.46	0.41	0.38	0.43	0.39	0.36	0.33	
	1.5	0.61	0.54	0.48	0.59	0.52	0.47	0.43	0.49	0.45	0.42	0.47	0.43	0.40	0.37	
	2	0.65	0.59	0.54	0.63	0.57	0.53	0.49	0.54	0.51	0.47	0.51	0.48	0.46	0.42	
	2.5	0.67	0.62	0.58	0.65	0.61	0.57	0.53	0.57	0.54	0.51	0.54	0.51	0.49	0.45	
	3	0.69	0.64	0.61	0.67	0.63	0.59	0.56	0.59	0.56	0.54	0.56	0.53	0.51	0.47	
	光源	4	0.71	0.68	0.64	0.69	0.66	0.63	0.60	0.62	0.60	0.57	0.59	0.57	0.55	0.50
品名	Hfコンパネ外形蛍光灯	5	0.73	0.70	0.67	0.71	0.68	0.65	0.63	0.64	0.62	0.60	0.61	0.59	0.57	0.53
形式	FHT42EX-N-B	7	0.75	0.73	0.70	0.73	0.71	0.69	0.67	0.67	0.65	0.64	0.63	0.62	0.61	0.56
光束	12,800 lm	10	0.77	0.75	0.73	0.74	0.73	0.71	0.70	0.69	0.68	0.67	0.66	0.65	0.64	0.59

器具効率 $F_t = 75.6\%$

上方光束 $F_u = 10.3\%$

下方光束 $F_d = 65.2\%$

配光分類

BZ-

最大取付間隔

A-A 2.18 H


B-B H

保守率	良	0.66
	中	0.63
	否	0.55

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	105		
10	125		
20	159		
30	200		
40	201		
50	152		
60	82		
70	43		
80	41		
90	39		
100	33		
110	25		
120	14		
130	5		
140	2		
150	2		
160	2		
170	2		
180			

単体照度分布(初期)

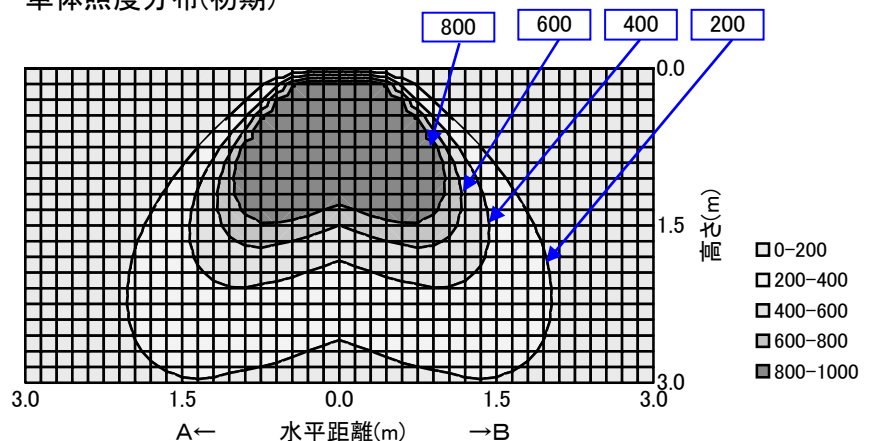

配光曲線

