


日立照明器具 照明特性

形式: HP4402-EX200		天井	80%			70%				50%			30%			0%
<連続調光形>		反射率	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		壁														
		床	10%													
		室指数	照明率 S/H=1.0													
姿図 	光源	0.6	0.39	0.31	0.25	0.38	0.30	0.25	0.21	0.29	0.25	0.21	0.28	0.24	0.21	0.20
		0.8	0.47	0.39	0.33	0.45	0.38	0.33	0.29	0.37	0.32	0.29	0.36	0.32	0.29	0.27
		1	0.52	0.44	0.39	0.50	0.44	0.39	0.35	0.42	0.38	0.34	0.41	0.37	0.34	0.32
		1.25	0.56	0.49	0.45	0.55	0.49	0.44	0.40	0.47	0.43	0.40	0.46	0.42	0.39	0.38
		1.5	0.59	0.53	0.49	0.58	0.53	0.48	0.45	0.51	0.47	0.44	0.49	0.46	0.44	0.42
		2	0.63	0.59	0.55	0.62	0.58	0.54	0.51	0.56	0.53	0.50	0.54	0.52	0.49	0.47
		2.5	0.65	0.61	0.58	0.64	0.61	0.57	0.55	0.59	0.56	0.54	0.57	0.55	0.53	0.51
		3	0.67	0.64	0.61	0.66	0.63	0.60	0.57	0.61	0.58	0.56	0.59	0.57	0.55	0.53
		4	0.69	0.66	0.64	0.68	0.65	0.63	0.61	0.63	0.61	0.60	0.62	0.60	0.58	0.56
		5	0.70	0.68	0.66	0.69	0.67	0.65	0.64	0.65	0.64	0.62	0.63	0.62	0.61	0.58
品名	HFコンパクト形蛍光ランプ	7	0.72	0.70	0.69	0.71	0.69	0.68	0.67	0.67	0.66	0.65	0.65	0.65	0.64	0.61
形式	FHT42EX-N-B	10	0.73	0.72	0.71	0.72	0.71	0.70	0.69	0.69	0.68	0.68	0.67	0.67	0.66	0.63
光束	12,800 lm															

器具効率 Ft= 69.5%

上方光束 Fu= 2.3%

下方光束 Fd= 67.3%

配光分類

BZ-

最大取付間隔

A-A 1.72 H


B-B H

保守率	良	0.66
	中	0.63
	否	0.55

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	176		
10	208		
20	191		
30	186		
40	200		
50	182		
60	123		
70	38		
80	6		
90	1		
100	1		
110	2		
120	3		
130	5		
140	7		
150	7		
160	6		
170	5		
180			

単体照度分布(初期)

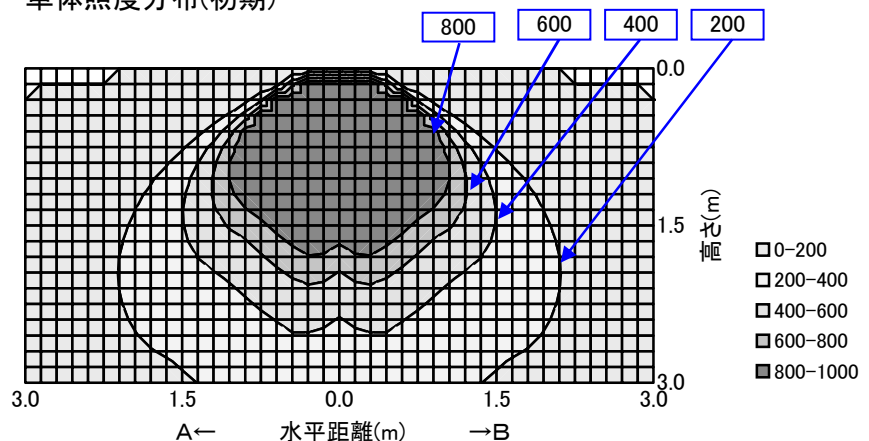

配光曲線

