

日立照明器具 照明特性

形式： HPF4401A-EN(32W)			反	天井	80%			70%				50%			30%			0%	
			射	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
				床	10%														
			室指数	照明率 S/H=1.0															
	0.6	0.41	0.32	0.27	0.40	0.32	0.26	0.23	0.30	0.25	0.22	0.29	0.25	0.21	0.20				
	0.8	0.49	0.40	0.35	0.47	0.39	0.34	0.30	0.38	0.33	0.30	0.36	0.32	0.29	0.27				
	1	0.53	0.46	0.40	0.52	0.45	0.40	0.36	0.43	0.38	0.35	0.41	0.37	0.34	0.31				
	1.25	0.58	0.51	0.45	0.56	0.49	0.45	0.41	0.47	0.43	0.40	0.45	0.41	0.39	0.36				
	1.5	0.61	0.54	0.50	0.59	0.53	0.49	0.45	0.51	0.47	0.44	0.48	0.45	0.42	0.39				
	2	0.65	0.59	0.55	0.63	0.58	0.54	0.51	0.55	0.52	0.49	0.53	0.50	0.47	0.44				
	2.5	0.67	0.62	0.58	0.65	0.61	0.57	0.54	0.58	0.55	0.52	0.55	0.53	0.50	0.47				
	3	0.68	0.64	0.61	0.66	0.63	0.59	0.56	0.60	0.57	0.54	0.57	0.55	0.53	0.49				
光源		4	0.70	0.67	0.64	0.69	0.65	0.63	0.60	0.62	0.60	0.58	0.59	0.57	0.56	0.52			
品名	Hfコンパクト形蛍光灯ランプ	5	0.72	0.69	0.66	0.70	0.67	0.65	0.63	0.64	0.62	0.60	0.61	0.60	0.58	0.54			
形式	FHT32EX-N-A	7	0.74	0.72	0.70	0.72	0.70	0.68	0.67	0.67	0.65	0.64	0.64	0.63	0.61	0.57			
光束	9,600 lm	10	0.75	0.74	0.72	0.73	0.72	0.71	0.70	0.69	0.68	0.67	0.66	0.65	0.64	0.60			

器具効率 $F_t = 73.5\%$
 上方光束 $F_u = 8.1\%$
 下方光束 $F_d = 65.4\%$

配光分類

BZ-

最大取付間隔

A-A 2.08 H


B-B H

保守率	良	0.66
	中	0.63
	否	0.55

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	119		
10	140		
20	187		
30	233		
40	228		
50	144		
60	53		
70	38		
80	35		
90	33		
100	27		
110	18		
120	9		
130	3		
140	3		
150	2		
160	2		
170	3		
180			

単体照度分布(初期)

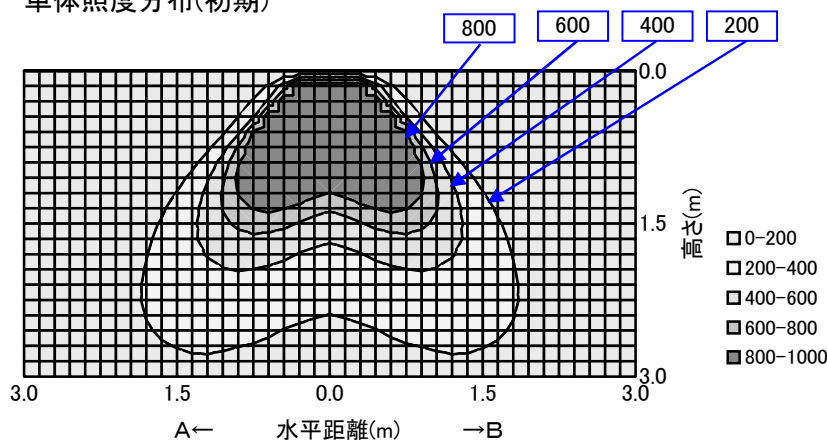

配光曲線

