
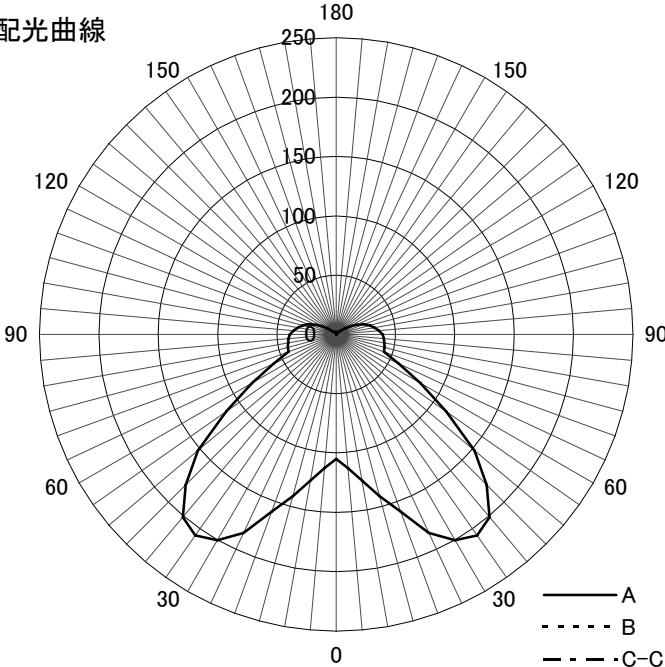


日立照明器具 照明特性

形式: HPF4401A-EN(42W)

反射率	天井	80%			70%			50%			30%			0%		
	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
	床	10%												0%		
	室指数	照明率 S/H=1.0														
姿図	0.6	0.40	0.31	0.25	0.39	0.30	0.24	0.20	0.28	0.23	0.20	0.27	0.22	0.19	0.17	
	0.8	0.48	0.39	0.33	0.46	0.38	0.32	0.28	0.36	0.31	0.27	0.34	0.30	0.26	0.24	
	1	0.53	0.45	0.39	0.51	0.43	0.38	0.34	0.41	0.36	0.32	0.39	0.35	0.31	0.29	
	1.25	0.57	0.50	0.44	0.55	0.48	0.43	0.39	0.46	0.41	0.38	0.43	0.39	0.36	0.33	
	1.5	0.61	0.54	0.48	0.59	0.52	0.47	0.43	0.49	0.45	0.42	0.47	0.43	0.40	0.37	
	2	0.65	0.59	0.54	0.63	0.57	0.53	0.49	0.54	0.51	0.47	0.51	0.48	0.46	0.42	
	2.5	0.67	0.62	0.58	0.65	0.61	0.57	0.53	0.57	0.54	0.51	0.54	0.51	0.49	0.45	
	3	0.69	0.64	0.61	0.67	0.63	0.59	0.56	0.59	0.56	0.54	0.56	0.53	0.51	0.47	
光源		4	0.71	0.68	0.64	0.69	0.66	0.63	0.60	0.62	0.60	0.57	0.59	0.57	0.55	0.50
品名		5	0.73	0.70	0.67	0.71	0.68	0.65	0.63	0.64	0.62	0.60	0.61	0.59	0.57	0.53
形式		7	0.75	0.73	0.70	0.73	0.71	0.69	0.67	0.67	0.65	0.64	0.63	0.62	0.61	0.56
光束		10	0.77	0.75	0.73	0.74	0.73	0.71	0.70	0.69	0.68	0.67	0.66	0.65	0.64	0.59
器具効率 $F_t =$		75.6%														
上方光束 $F_u =$		10.3%														
下方光束 $F_d =$		65.2%														
配光分類		BZ-														
最大取付間隔		A-A 2.18 H														
A-B		H														
保守率		良	0.66													
中		0.63														
否		0.55														
光度 (cd/1000 lm)																
		A-0	B-B	C-0												
		0	105													
		10	125													
		20	159													
		30	200													
		40	201													
		50	152													
		60	82													
		70	43													
		80	41													
		90	39													
		100	33													
		110	25													
		120	14													
		130	5													
		140	2													
		150	2													
		160	2													
		170	2													
		180														

 日立アプライアンス株式会社

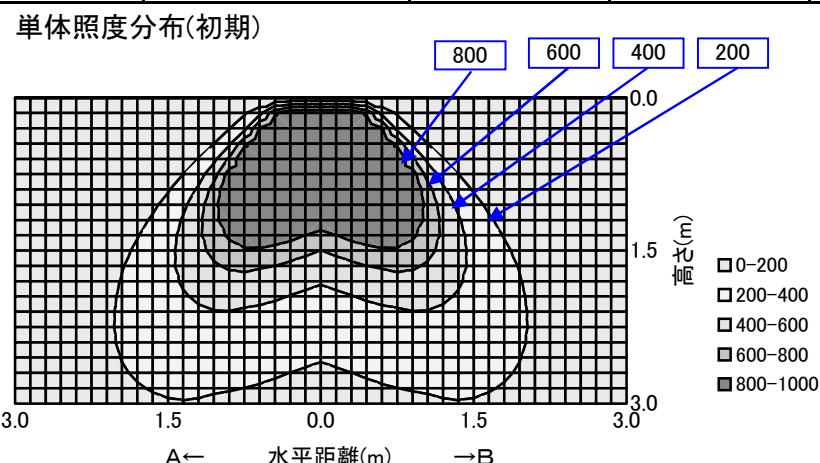

HPF4401A-EN(42W)