


日立照明器具 照明特性

形式：HPF4402A-EN(32W)		天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
		室指数	照明率 S/H=1.0													
	0.6	0.40	0.32	0.27	0.39	0.32	0.27	0.23	0.31	0.26	0.23	0.30	0.26	0.23	0.22	
	0.8	0.47	0.40	0.35	0.46	0.40	0.35	0.31	0.38	0.34	0.31	0.37	0.34	0.31	0.29	
	1	0.52	0.46	0.41	0.51	0.45	0.41	0.37	0.44	0.40	0.37	0.42	0.39	0.36	0.35	
	1.25	0.56	0.51	0.46	0.55	0.50	0.46	0.43	0.48	0.45	0.42	0.47	0.44	0.41	0.40	
	1.5	0.59	0.54	0.50	0.58	0.53	0.50	0.47	0.52	0.49	0.46	0.50	0.48	0.45	0.43	
	2	0.63	0.59	0.56	0.62	0.58	0.55	0.52	0.56	0.54	0.51	0.55	0.52	0.50	0.48	
	2.5	0.65	0.62	0.59	0.64	0.61	0.58	0.56	0.59	0.57	0.54	0.57	0.55	0.53	0.51	
	3	0.66	0.63	0.61	0.65	0.62	0.60	0.58	0.61	0.58	0.57	0.59	0.57	0.55	0.53	
光源		4	0.68	0.66	0.64	0.67	0.65	0.63	0.61	0.63	0.61	0.60	0.61	0.60	0.58	0.56
品名	Hfコンパネ形蛍光ランプ	5	0.69	0.67	0.66	0.68	0.66	0.65	0.63	0.64	0.63	0.62	0.63	0.61	0.60	0.58
形式	FHT32EX-N-A	7	0.71	0.69	0.68	0.70	0.68	0.67	0.66	0.66	0.65	0.65	0.65	0.64	0.63	0.60
光束	9,600 lm	10	0.72	0.71	0.70	0.71	0.70	0.69	0.69	0.68	0.67	0.67	0.66	0.66	0.65	0.63

器具効率 Ft= 68.2%			
上方光束 Fu= 2.7%			
下方光束 Fd= 65.4%			
配光分類			
BZ-			
最大取付間隔			
A-A		1.80	H
B-B			H
保守率	良	0.66	
	中	0.63	
	否	0.55	
光 度 (cd/1000 lm)			
	A-0	B-B	C-0
0	181		
10	210		
20	214		
30	214		
40	220		
50	189		
60	82		
70	17		
80	4		
90	1		
100	2		
110	3		
120	4		
130	6		
140	7		
150	8		
160	6		
170	5		
180			

単体照度分布(初期)

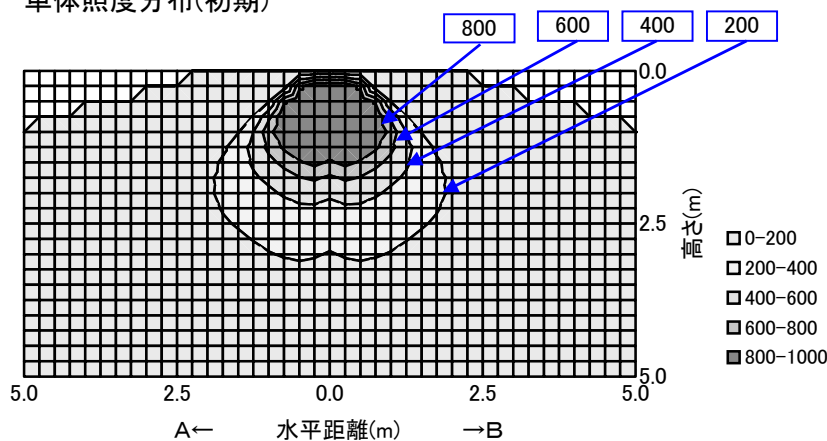

配光曲線

