


日立照明器具 照明特性

形式: HPK11108VB-EN <定格出力形> <初期照度補正形>		天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
		室指数	照明率 S/H=1.0														
姿図 	0.6	0.48	0.36	0.28	0.46	0.35	0.28	0.23	0.34	0.28	0.23	0.33	0.27	0.23	0.21		
	0.8	0.56	0.45	0.37	0.54	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.30	0.28		
	1	0.62	0.51	0.43	0.60	0.50	0.42	0.37	0.48	0.42	0.36	0.46	0.41	0.36	0.34		
	1.25	0.67	0.57	0.49	0.65	0.56	0.49	0.43	0.54	0.48	0.43	0.52	0.47	0.42	0.40		
	1.5	0.71	0.62	0.55	0.69	0.61	0.54	0.48	0.59	0.53	0.48	0.57	0.51	0.47	0.44		
	2	0.76	0.68	0.62	0.75	0.67	0.61	0.56	0.65	0.60	0.55	0.63	0.58	0.54	0.52		
	2.5	0.80	0.73	0.67	0.78	0.71	0.66	0.61	0.69	0.64	0.60	0.67	0.63	0.59	0.56		
	3	0.82	0.76	0.70	0.80	0.75	0.70	0.65	0.72	0.68	0.64	0.70	0.66	0.63	0.60		
	4	0.85	0.80	0.76	0.84	0.79	0.75	0.71	0.76	0.73	0.69	0.74	0.71	0.68	0.65		
光源	4	0.85	0.80	0.76	0.84	0.79	0.75	0.71	0.76	0.73	0.69	0.74	0.71	0.68	0.65		
品名	Hf蛍光ランプ	5	0.87	0.83	0.79	0.86	0.82	0.78	0.75	0.79	0.76	0.73	0.77	0.74	0.72	0.69	
形式	FHF86EN-K	7	0.90	0.87	0.84	0.88	0.85	0.83	0.80	0.83	0.80	0.78	0.81	0.79	0.77	0.74	
光束	9,000 lm	10	0.92	0.90	0.87	0.91	0.88	0.86	0.84	0.86	0.84	0.82	0.84	0.82	0.81	0.78	

器具効率 Ft= 89.5%

上方光束 Fu= 1.6%

下方光束 Fd= 87.9%

配光分類

BZ-

最大取付間隔

A-A 1.44 H

B-B 1.40 H

保守率

良 0.73


中 0.69

否 0.61

光度 (cd/1000 lm)


	A-0	B-B	C-0	A'-0	C'-0
0	216	216	216		
10	214	215	212		
20	211	211	209		
30	205	202	204		
40	197	184	194		
50	184	153	180		
60	160	114	156		
70	132	74	120		
80	109	32	89		
90	56		40		
100	4				
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期)

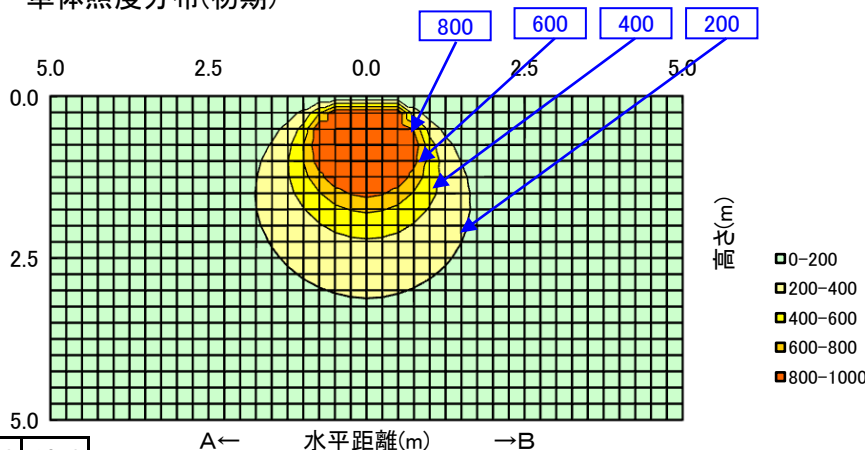

0-200
200-400
400-600
600-800
800-1000

配光曲線

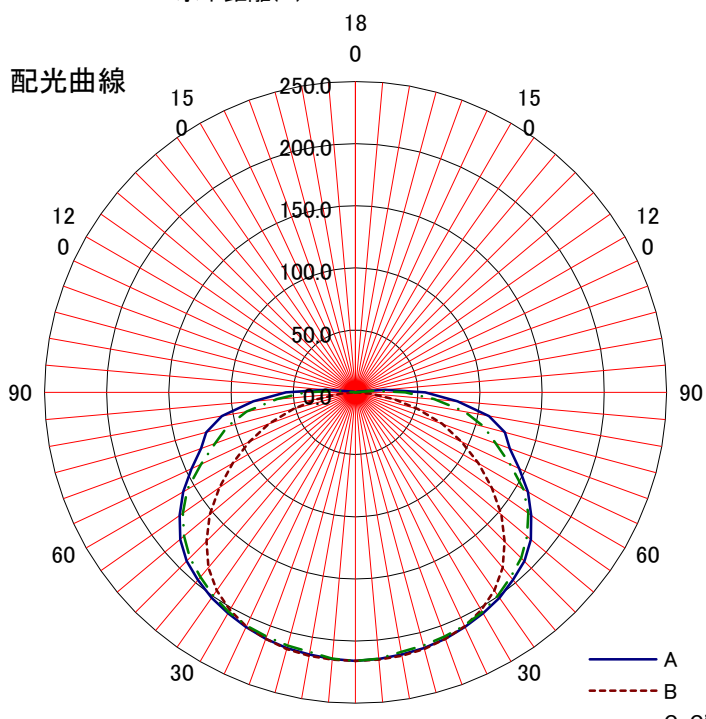

A
B
C-C'