


日立照明器具 照明特性

形式： HPK11108VH-EU14		反 射 率	天井	80%			70%				50%			30%			0%		
HF86ハイパワー 〈高出力形〉			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
		0.6	0.47	0.35	0.28	0.45	0.35	0.28	0.23	0.33	0.27	0.23	0.32	0.27	0.22	0.20			
		0.8	0.55	0.44	0.36	0.53	0.43	0.36	0.30	0.41	0.35	0.30	0.40	0.34	0.30	0.28			
		1	0.60	0.50	0.42	0.59	0.49	0.42	0.36	0.47	0.41	0.36	0.45	0.40	0.35	0.33			
		1.25	0.66	0.56	0.48	0.64	0.55	0.48	0.42	0.53	0.47	0.42	0.51	0.46	0.41	0.39			
		1.5	0.70	0.60	0.53	0.68	0.59	0.53	0.47	0.57	0.52	0.47	0.55	0.50	0.46	0.44			
		2	0.75	0.67	0.61	0.73	0.66	0.60	0.55	0.64	0.58	0.54	0.62	0.57	0.53	0.51			
		2.5	0.78	0.71	0.65	0.76	0.70	0.65	0.60	0.68	0.63	0.59	0.66	0.62	0.58	0.55			
		3	0.80	0.74	0.69	0.79	0.73	0.68	0.64	0.71	0.66	0.63	0.68	0.65	0.62	0.59			
光源		4	0.84	0.78	0.74	0.82	0.77	0.73	0.69	0.75	0.71	0.68	0.72	0.69	0.67	0.64			
品名	HF86光ランプ〈ハイパワーUV〉	5	0.86	0.81	0.77	0.84	0.80	0.76	0.73	0.78	0.75	0.72	0.75	0.73	0.70	0.67			
形式	FHF86EN-HPV-A	7	0.88	0.85	0.82	0.87	0.84	0.81	0.78	0.81	0.79	0.77	0.79	0.77	0.75	0.72			
光束	10,700 lm	10	0.90	0.88	0.86	0.89	0.87	0.85	0.83	0.84	0.82	0.81	0.82	0.80	0.79	0.76			

器具効率 Ft= 87.7%

上方光束 Fu= 1.6%

下方光束 Fd= 86.1%

配光分類

BZ-

最大取付間隔

A-A 1.44 H


B-B 1.40 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	212	212	212
10	210	211	208
20	207	207	205
30	201	198	200
40	193	180	190
50	180	150	176
60	157	112	153
70	129	72	118
80	107	31	87
90	55		39
100	4		
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

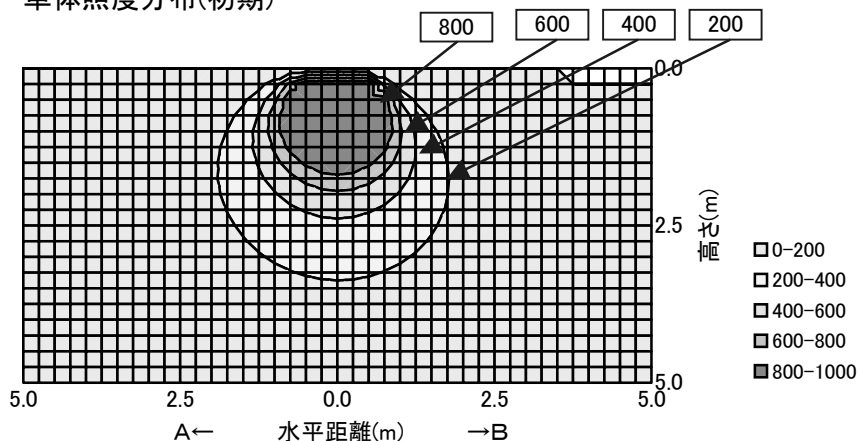

配光曲線

