


日立照明器具 照明特性


形式: HPK11208VB-EN <定格出力形> <初期照度補正形>		天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
				床	10%												
		反射率	照明率 S/H=1.0														
室指数																	

	0.6	0.48	0.36	0.29	0.46	0.36	0.29	0.24	0.35	0.28	0.24	0.34	0.28	0.24	0.22
	0.8	0.56	0.45	0.37	0.54	0.44	0.37	0.32	0.43	0.36	0.31	0.41	0.36	0.31	0.29
	1	0.61	0.51	0.44	0.60	0.50	0.43	0.38	0.48	0.42	0.37	0.47	0.41	0.37	0.35
	1.25	0.67	0.57	0.50	0.65	0.56	0.49	0.44	0.54	0.48	0.43	0.52	0.47	0.43	0.40
	1.5	0.71	0.62	0.55	0.69	0.61	0.54	0.49	0.59	0.53	0.49	0.57	0.52	0.48	0.45
	2	0.76	0.68	0.62	0.74	0.67	0.62	0.57	0.65	0.60	0.56	0.63	0.59	0.55	0.52
	2.5	0.79	0.73	0.67	0.78	0.71	0.66	0.62	0.69	0.65	0.61	0.67	0.63	0.60	0.57
	3	0.81	0.76	0.71	0.80	0.74	0.70	0.66	0.72	0.68	0.64	0.70	0.66	0.63	0.60
	4	0.85	0.80	0.76	0.83	0.79	0.75	0.71	0.76	0.73	0.70	0.74	0.71	0.68	0.65

光源	4	0.85	0.80	0.76	0.83	0.79	0.75	0.71	0.76	0.73	0.70	0.74	0.71	0.68	0.65
品名 Hf蛍光ランプ	5	0.87	0.83	0.79	0.85	0.81	0.78	0.75	0.79	0.76	0.73	0.77	0.74	0.72	0.69
形式 FHF86EN-K	7	0.89	0.86	0.83	0.87	0.85	0.82	0.80	0.82	0.80	0.78	0.80	0.78	0.76	0.73
光束 18,000 lm	10	0.91	0.89	0.87	0.89	0.88	0.86	0.84	0.85	0.84	0.82	0.83	0.82	0.80	0.77


器具効率 Ft= 88.0%					
上方光束 Fu= 1.7%					
下方光束 Fd= 86.3%					
配光分類					
BZ-					
最大取付間隔					
A-A 1.40 H					
B-B 1.38 H					
保守率	良	0.73			
	中	0.69			
	否	0.61			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	226	226	226		
10	225	224	224		
20	221	220	221		
30	211	211	212		
40	196	190	198		
50	177	159	177		
60	155	117	149		
70	129	74	117		
80	88	29	78		
90	38		25		
100	15		5		
110	1				
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期)

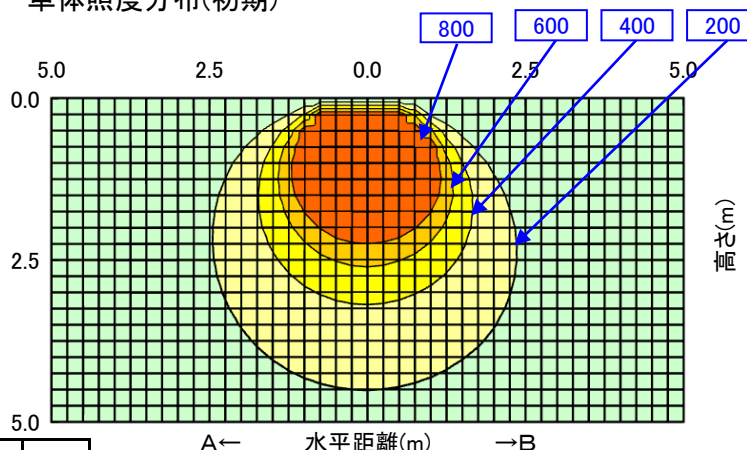

0-200
200-400
400-600
600-800
800-1000

配光曲線

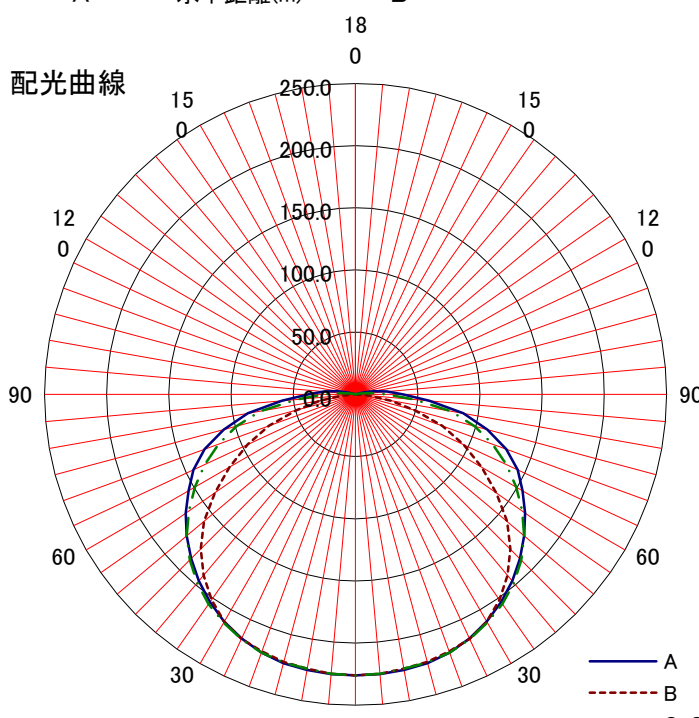

A
B
C-C'