

日立照明器具 照明特性

形式： HPK11208VH-EU24		反 射 率	天井	80%			70%				50%			30%			0%		
HF86ハイパワー 〈高出力形〉			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
		0.6	0.47	0.36	0.28	0.45	0.35	0.28	0.23	0.34	0.28	0.23	0.33	0.27	0.23	0.21			
		0.8	0.55	0.44	0.37	0.53	0.43	0.36	0.31	0.42	0.36	0.31	0.40	0.35	0.31	0.28			
		1	0.60	0.50	0.43	0.59	0.49	0.42	0.37	0.47	0.41	0.36	0.46	0.40	0.36	0.34			
		1.25	0.65	0.56	0.49	0.64	0.55	0.48	0.43	0.53	0.47	0.42	0.51	0.46	0.42	0.40			
		1.5	0.69	0.61	0.54	0.68	0.60	0.53	0.48	0.58	0.52	0.48	0.56	0.51	0.47	0.44			
		2	0.74	0.67	0.61	0.73	0.66	0.60	0.56	0.64	0.59	0.55	0.62	0.58	0.54	0.51			
		2.5	0.78	0.71	0.66	0.76	0.70	0.65	0.61	0.68	0.63	0.60	0.66	0.62	0.59	0.56			
		3	0.80	0.74	0.69	0.78	0.73	0.68	0.64	0.71	0.67	0.63	0.68	0.65	0.62	0.59			
光 源		4	0.83	0.78	0.74	0.81	0.77	0.73	0.70	0.75	0.71	0.68	0.72	0.69	0.67	0.64			
品名	HF蛍光ランプ〈ハイパワーUV〉	5	0.85	0.81	0.77	0.83	0.80	0.76	0.73	0.77	0.74	0.72	0.75	0.73	0.70	0.67			
形式	FHF86EN-HPV-A	7	0.87	0.84	0.82	0.86	0.83	0.80	0.78	0.81	0.78	0.76	0.78	0.77	0.75	0.72			
光束	21,400 lm	10	0.89	0.87	0.85	0.88	0.86	0.84	0.82	0.83	0.82	0.80	0.81	0.80	0.79	0.76			

器具効率 $F_t = 86.2\%$
 上方光束 $F_u = 1.7\%$
 下方光束 $F_d = 84.5\%$

配光分類

BZ-

最大取付間隔

A-A 1.40 H


B-B 1.40 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	221	221	221
10	220	219	219
20	216	215	216
30	207	207	208
40	192	186	194
50	173	156	173
60	152	115	146
70	126	72	115
80	86	28	76
90	37		24
100	15		5
110	1		
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

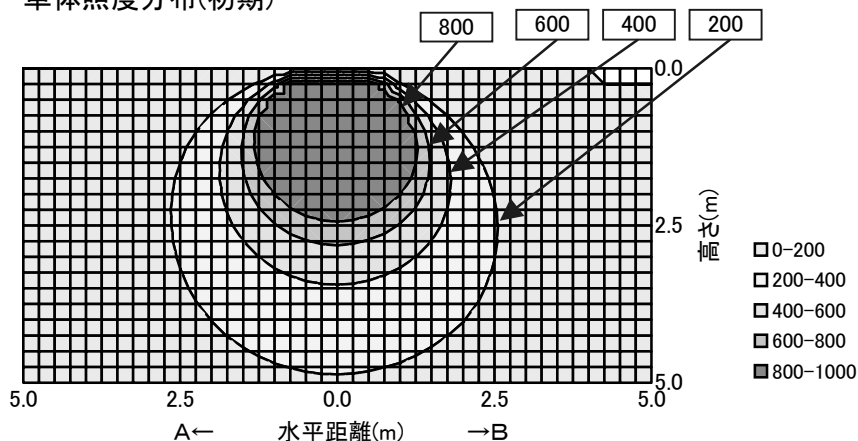

配光曲線

