

日立照明器具 照明特性

形式： HPK4128A-MEU14		反 射 率	天井	80%			70%				50%			30%			0%
〈高出力形〉 〈直下照度形〉			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													
			室指数	照明率 S/H=1.0													
姿図			0.6	0.55	0.45	0.38	0.54	0.44	0.38	0.33	0.43	0.37	0.33	0.42	0.37	0.33	0.31
			0.8	0.63	0.53	0.46	0.62	0.53	0.46	0.41	0.51	0.45	0.41	0.50	0.45	0.40	0.39
			1	0.69	0.59	0.52	0.67	0.58	0.52	0.47	0.57	0.51	0.46	0.55	0.50	0.46	0.44
			1.25	0.74	0.65	0.58	0.72	0.64	0.58	0.53	0.62	0.57	0.52	0.61	0.56	0.52	0.49
			1.5	0.77	0.69	0.63	0.76	0.68	0.62	0.58	0.66	0.61	0.57	0.65	0.60	0.56	0.54
			2	0.82	0.75	0.70	0.81	0.74	0.69	0.65	0.72	0.68	0.64	0.70	0.66	0.63	0.61
			2.5	0.85	0.79	0.74	0.84	0.78	0.73	0.69	0.76	0.72	0.68	0.74	0.71	0.67	0.65
			3	0.87	0.82	0.77	0.86	0.81	0.77	0.73	0.79	0.75	0.72	0.77	0.74	0.71	0.68
光源			4	0.90	0.86	0.82	0.89	0.85	0.81	0.78	0.83	0.79	0.77	0.80	0.78	0.75	0.73
品名	Hf蛍光ランプ		5	0.92	0.89	0.85	0.91	0.87	0.84	0.81	0.85	0.82	0.80	0.83	0.81	0.79	0.76
形式	FHF32EX-N-H		7	0.95	0.92	0.89	0.93	0.91	0.88	0.86	0.88	0.86	0.85	0.86	0.85	0.83	0.80
光束	4.950 lm		10	0.96	0.94	0.93	0.95	0.93	0.92	0.90	0.91	0.90	0.88	0.89	0.88	0.87	0.84

器具効率 $F_t = 92.4\%$
 上方光束 $F_u = 0.5\%$
 下方光束 $F_d = 91.9\%$

配光分類

BZ-

最大取付間隔

A-A 0.58 H


B-B 1.24 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	500	500	500
10	424	490	465
20	220	460	310
30	165	415	192
40	145	350	150
50	126	272	119
60	118	185	91
70	116	96	79
80	83	26	89
90	20		12
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

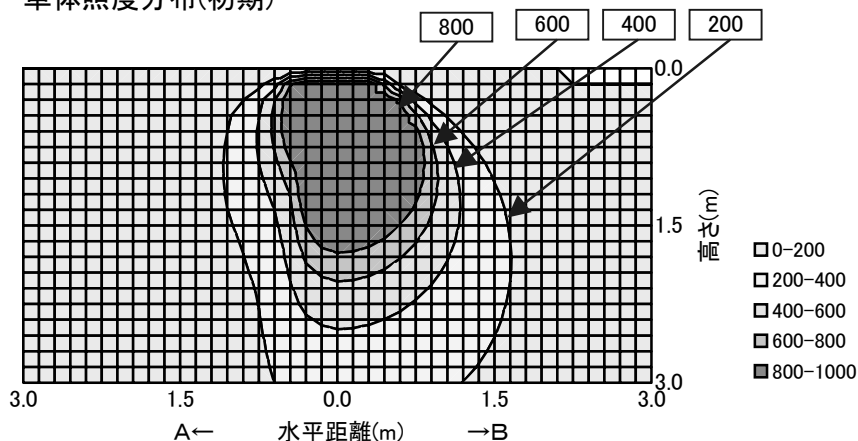

配光曲線

