

日立照明器具 照明特性

形式： HPM4105V-PKU14		反 射 率	天井	80%			70%				50%			30%			0%		
＜高出力形＞ ＜初期照度補正形＞			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
		0.6	0.48	0.36	0.28	0.46	0.34	0.27	0.22	0.31	0.25	0.21	0.28	0.23	0.19	0.15			
		0.8	0.57	0.45	0.36	0.53	0.43	0.35	0.29	0.39	0.32	0.27	0.35	0.29	0.25	0.21			
		1	0.62	0.51	0.43	0.59	0.49	0.41	0.35	0.44	0.38	0.33	0.40	0.34	0.30	0.25			
		1.25	0.68	0.57	0.49	0.64	0.55	0.47	0.41	0.49	0.43	0.38	0.45	0.39	0.35	0.29			
		1.5	0.72	0.62	0.54	0.68	0.59	0.52	0.47	0.54	0.48	0.43	0.49	0.44	0.40	0.33			
		2	0.78	0.69	0.62	0.74	0.66	0.59	0.54	0.60	0.54	0.50	0.54	0.50	0.46	0.39			
		2.5	0.81	0.74	0.67	0.77	0.70	0.64	0.59	0.64	0.59	0.55	0.58	0.54	0.50	0.43			
		3	0.84	0.77	0.71	0.79	0.73	0.68	0.63	0.67	0.62	0.58	0.60	0.57	0.54	0.46			
光 源		4	0.87	0.81	0.76	0.83	0.78	0.73	0.69	0.71	0.67	0.64	0.64	0.61	0.58	0.50			
品名	Hf形蛍光ランプ ^o	5	0.89	0.84	0.80	0.85	0.81	0.77	0.73	0.74	0.70	0.67	0.67	0.64	0.62	0.53			
形式	FHF32EX-N-H	7	0.92	0.88	0.85	0.88	0.84	0.81	0.78	0.77	0.75	0.72	0.70	0.68	0.66	0.57			
光束	4,950 lm	10	0.94	0.91	0.89	0.90	0.88	0.85	0.83	0.80	0.78	0.77	0.73	0.72	0.70	0.61			

器具効率 Ft= 97.0%

上方光束 Fu= 25.9%

下方光束 Fd= 71.1%

配光分類

BZ-

最大取付間隔

A-A 1.58 H


B-B 1.24 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	160	160	160
10	162	156	160
20	163	148	157
30	163	132	149
40	164	111	141
50	162	92	133
60	155	66	121
70	141	37	105
80	126	16	86
90	118		74
100	119		77
110	120		81
120	108		52
130	66		18
140	25		1
150			
160			
170			
180			

単体照度分布(初期)

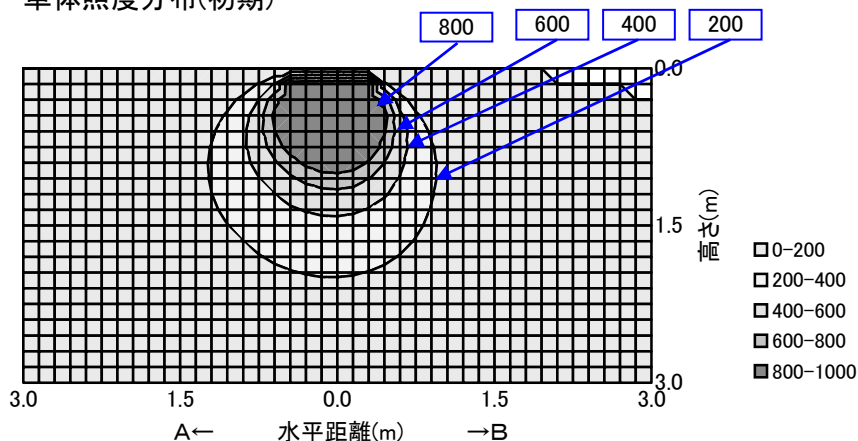

配光曲線

