


日立照明器具 照明特性

形式： HPM4205V-PKN14 ＜定格出力形＞ ＜初期照度補正形＞		反 射 率	天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
姿図 		0.6	0.45	0.34	0.27	0.43	0.33	0.26	0.22	0.30	0.24	0.20	0.27	0.22	0.18	0.15		
		0.8	0.53	0.42	0.35	0.50	0.40	0.34	0.29	0.37	0.31	0.26	0.33	0.28	0.24	0.20		
		1	0.59	0.48	0.41	0.55	0.46	0.39	0.34	0.42	0.36	0.31	0.37	0.33	0.29	0.24		
		1.25	0.64	0.54	0.47	0.60	0.52	0.45	0.40	0.47	0.41	0.37	0.42	0.37	0.34	0.28		
		1.5	0.67	0.59	0.52	0.64	0.56	0.50	0.45	0.51	0.45	0.41	0.46	0.41	0.38	0.32		
		2	0.73	0.65	0.59	0.69	0.62	0.56	0.52	0.56	0.52	0.48	0.51	0.47	0.44	0.37		
		2.5	0.76	0.69	0.64	0.72	0.66	0.61	0.57	0.60	0.56	0.52	0.54	0.51	0.48	0.40		
		3	0.78	0.72	0.67	0.74	0.69	0.64	0.60	0.62	0.59	0.55	0.56	0.53	0.51	0.43		
光源		4	0.81	0.76	0.72	0.77	0.73	0.69	0.66	0.66	0.63	0.60	0.60	0.57	0.55	0.47		
品名	Hf形蛍光ランプ	5	0.83	0.79	0.75	0.79	0.75	0.72	0.69	0.69	0.66	0.63	0.62	0.60	0.58	0.49		
形式	FHF32EX-N-H	7	0.85	0.82	0.80	0.82	0.79	0.76	0.74	0.72	0.70	0.68	0.65	0.63	0.62	0.53		
光束	7,040 lm	10	0.87	0.85	0.83	0.83	0.81	0.80	0.78	0.74	0.73	0.71	0.68	0.66	0.65	0.56		

器具効率 $F_t = 89.8\%$
 上方光束 $F_u = 26.2\%$
 下方光束 $F_d = 63.7\%$

配光分類

BZ-

最大取付間隔

A-A 1.50 H


B-B 1.24 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	159	159	159
10	160	155	158
20	159	147	154
30	157	132	145
40	152	111	135
50	143	91	123
60	138	64	104
70	127	36	97
80	92	15	71
90	59		37
100	92	2	61
110	91	5	51
120	66	8	45
130	61	14	48
140	61	17	40
150	46	16	26
160	31	22	17
170	26	30	23
180			

単体照度分布(初期)

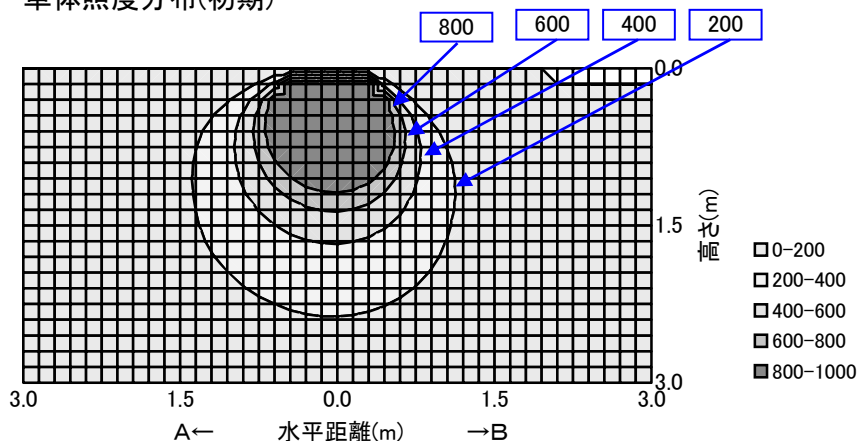

配光曲線

