


日立照明器具 照明特性

形式: HTG4260-MEN14		天井	80%			70%				50%			30%			0%
<定格出力形>		反射率	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		壁	10%													
		床	0%													
		室指数	照明率 S/H=1.0													
姿図 		0.6	0.35	0.28	0.24	0.35	0.28	0.24	0.21	0.28	0.24	0.21	0.27	0.23	0.21	0.20
		0.8	0.41	0.35	0.30	0.41	0.34	0.30	0.27	0.34	0.30	0.27	0.33	0.29	0.27	0.26
		1	0.45	0.39	0.35	0.44	0.39	0.35	0.32	0.38	0.34	0.31	0.37	0.34	0.31	0.30
		1.25	0.49	0.43	0.39	0.48	0.43	0.39	0.36	0.42	0.38	0.36	0.41	0.38	0.35	0.34
		1.5	0.51	0.46	0.43	0.50	0.46	0.42	0.40	0.45	0.42	0.39	0.44	0.41	0.39	0.37
		2	0.55	0.51	0.47	0.54	0.50	0.47	0.44	0.49	0.46	0.44	0.48	0.45	0.43	0.42
		2.5	0.56	0.53	0.50	0.56	0.52	0.50	0.47	0.51	0.49	0.47	0.50	0.48	0.46	0.45
		3	0.58	0.55	0.52	0.57	0.54	0.52	0.49	0.53	0.51	0.49	0.52	0.50	0.48	0.47
光源		4	0.59	0.57	0.55	0.59	0.56	0.54	0.53	0.55	0.53	0.52	0.54	0.52	0.51	0.49
品名	Hf蛍光灯	5	0.60	0.59	0.57	0.60	0.58	0.56	0.55	0.57	0.55	0.54	0.55	0.54	0.53	0.51
形式	FHF32EX-N-H	7	0.62	0.60	0.59	0.61	0.60	0.59	0.57	0.58	0.57	0.56	0.57	0.56	0.56	0.54
光束	7,040 lm	10	0.63	0.62	0.61	0.62	0.61	0.60	0.60	0.60	0.59	0.59	0.59	0.58	0.58	0.56

器具効率 $F_t = 59.6\%$
 上方光束 $F_u = 0.0\%$
 下方光束 $F_d = 59.6\%$

配光分類

BZ-

最大取付間隔

A-A 1.42 H

B-B 1.26 H

保守率


良
中
否

0.70
0.66
0.62

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	212	212	212
10	215	205	210
20	210	196	204
30	203	177	190
40	181	151	166
50	150	118	134
60	90	80	85
70	41	36	39
80	20	20	20
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

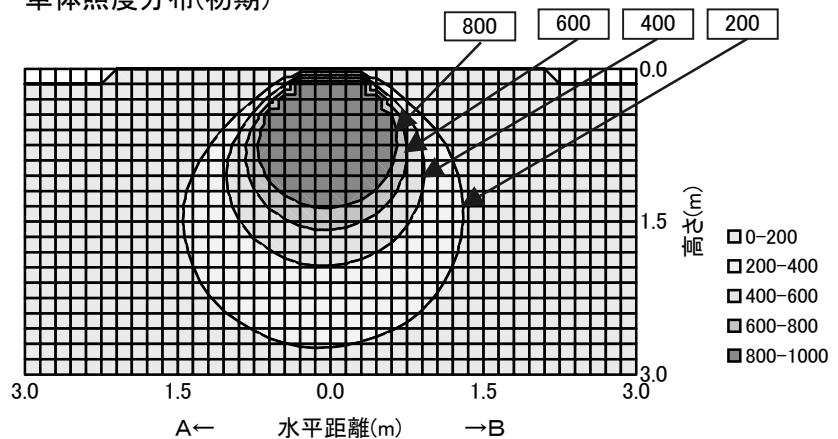

配光曲線

