

日立照明器具 照明特性

形式：HTL4232V-PKU14 ＜高出力形＞ ＜初期照度補正形＞	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
	室指数	照明率 S/H=1.0														
	0.6	0.46	0.37	0.31	0.45	0.36	0.31	0.27	0.35	0.30	0.27	0.35	0.30	0.27	0.25	
	0.8	0.53	0.45	0.39	0.52	0.44	0.39	0.35	0.43	0.38	0.34	0.42	0.38	0.34	0.33	
	1	0.58	0.50	0.45	0.57	0.50	0.44	0.40	0.48	0.44	0.40	0.47	0.43	0.40	0.38	
	1.25	0.62	0.55	0.50	0.61	0.55	0.50	0.46	0.53	0.49	0.45	0.52	0.48	0.45	0.43	
	1.5	0.66	0.59	0.55	0.64	0.59	0.54	0.50	0.57	0.53	0.50	0.56	0.52	0.49	0.48	
	2	0.70	0.65	0.60	0.69	0.64	0.60	0.57	0.62	0.59	0.56	0.61	0.58	0.55	0.54	
	2.5	0.72	0.68	0.64	0.71	0.67	0.64	0.61	0.65	0.62	0.60	0.64	0.61	0.59	0.57	
	3	0.74	0.70	0.67	0.73	0.69	0.66	0.63	0.67	0.65	0.62	0.66	0.64	0.62	0.60	
光 源		4	0.76	0.73	0.70	0.75	0.72	0.70	0.67	0.70	0.68	0.66	0.69	0.67	0.65	0.63
品名	Hf蛍光ランプ	5	0.78	0.75	0.73	0.76	0.74	0.72	0.70	0.72	0.71	0.69	0.71	0.69	0.68	0.66
形式	FHF32EX-N-H	7	0.79	0.77	0.76	0.78	0.77	0.75	0.74	0.75	0.73	0.72	0.73	0.72	0.71	0.69
光束	9,900 lm	10	0.81	0.79	0.78	0.80	0.79	0.77	0.76	0.77	0.76	0.75	0.75	0.74	0.74	0.71

器具効率 $F_t = 76.5\%$
 上方光束 $F_u = 0.2\%$
 下方光束 $F_d = 76.3\%$

配光分類

BZ-

最大取付間隔

A-A 1.28 H


B-B 1.16 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	295	295	295
10	289	283	286
20	274	257	264
30	251	226	235
40	224	188	199
50	188	146	161
60	127	99	114
70	66	53	58
80	23	20	21
90	5		6
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

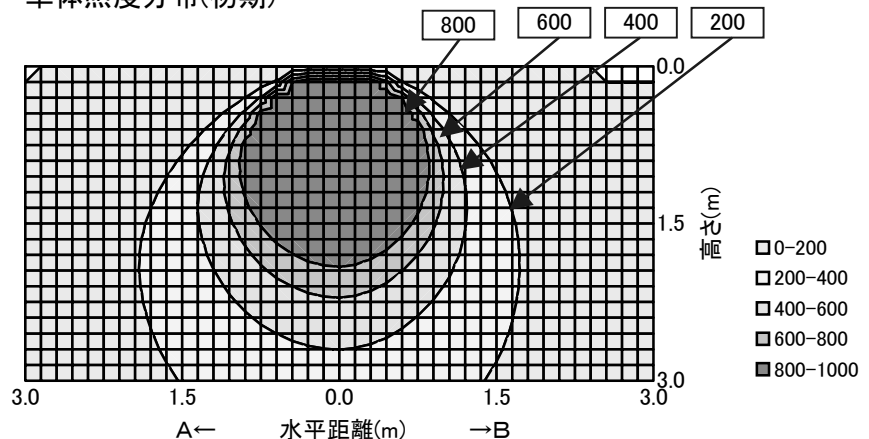

配光曲線

