

日立照明器具 照明特性

形式： HTL45401-PKN14		反	天井	80%			70%				50%			30%			0%	
＜定格出力形＞ ＜初期照度補正形＞		射	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														
		室指数		照明率 S/H=1.0														
		0.6	0.45	0.37	0.32	0.44	0.37	0.32	0.28	0.36	0.32	0.28	0.35	0.31	0.28	0.27		
		0.8	0.52	0.45	0.40	0.51	0.44	0.40	0.36	0.44	0.39	0.36	0.43	0.39	0.36	0.34		
		1	0.57	0.50	0.45	0.56	0.50	0.45	0.42	0.49	0.45	0.41	0.48	0.44	0.41	0.40		
		1.25	0.61	0.55	0.50	0.60	0.54	0.50	0.47	0.53	0.49	0.46	0.52	0.49	0.46	0.45		
		1.5	0.64	0.59	0.55	0.63	0.58	0.54	0.51	0.57	0.53	0.51	0.56	0.53	0.50	0.49		
		2	0.68	0.63	0.60	0.67	0.63	0.59	0.57	0.61	0.58	0.56	0.60	0.58	0.55	0.54		
		2.5	0.70	0.66	0.63	0.69	0.65	0.62	0.60	0.64	0.61	0.59	0.63	0.60	0.59	0.57		
		3	0.71	0.68	0.65	0.70	0.67	0.65	0.62	0.66	0.63	0.61	0.64	0.62	0.61	0.59		
光 源		4	0.73	0.71	0.68	0.72	0.70	0.68	0.66	0.68	0.66	0.65	0.67	0.65	0.64	0.62		
品名	コンパクト形Hf蛍光ランプ	5	0.74	0.72	0.70	0.73	0.71	0.70	0.68	0.70	0.68	0.67	0.68	0.67	0.66	0.64		
形式	FHP45EN	7	0.76	0.74	0.73	0.75	0.74	0.72	0.71	0.72	0.71	0.70	0.71	0.70	0.69	0.67		
光束	17,400 lm	10	0.77	0.76	0.75	0.76	0.75	0.74	0.74	0.74	0.73	0.72	0.72	0.72	0.71	0.69		

器具効率 $F_t = 72.7\%$
 上方光束 $F_u = 0.0\%$
 下方光束 $F_d = 72.6\%$

配光分類

BZ-

最大取付間隔

A-A 1.32 H


B-B 1.18 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	308	308	308
10	304	298	300
20	292	276	283
30	274	242	252
40	224	198	218
50	148	156	164
60	60	104	89
70	26	54	34
80	10	18	13
90		1	
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

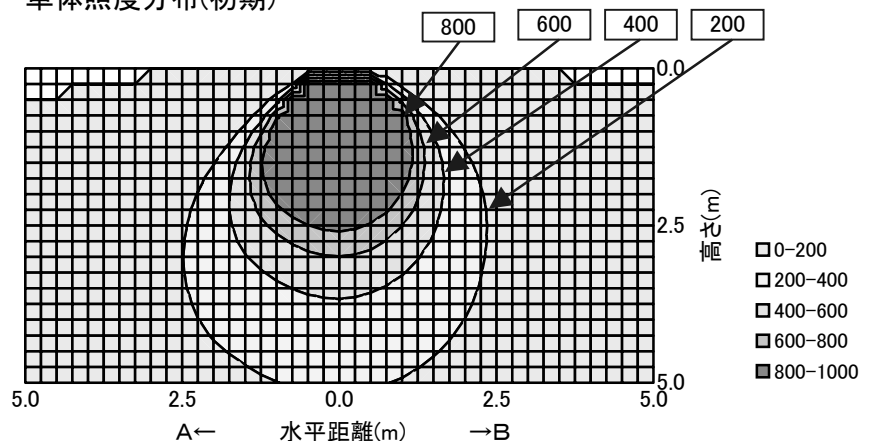

配光曲線

