


日立照明器具 照明特性


形式: HTM4108-MEU14 〈高出力形〉	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
姿図 	室指数		照明率 S/H=1.0													
	0.6		0.42	0.34	0.29	0.42	0.34	0.29	0.25	0.33	0.28	0.25	0.32	0.28	0.25	0.24
	0.8		0.50	0.42	0.37	0.49	0.42	0.37	0.33	0.41	0.36	0.33	0.40	0.36	0.33	0.31
	1		0.55	0.48	0.43	0.54	0.47	0.43	0.39	0.46	0.42	0.39	0.45	0.41	0.38	0.37
	1.25		0.59	0.53	0.48	0.58	0.52	0.48	0.44	0.51	0.47	0.44	0.50	0.47	0.44	0.42
	1.5		0.62	0.57	0.53	0.61	0.56	0.52	0.49	0.55	0.51	0.49	0.54	0.51	0.48	0.47
	2		0.66	0.62	0.58	0.65	0.61	0.58	0.55	0.60	0.57	0.54	0.59	0.56	0.54	0.52
	2.5		0.69	0.65	0.62	0.68	0.64	0.61	0.59	0.63	0.60	0.58	0.61	0.59	0.57	0.55
	3		0.70	0.67	0.64	0.69	0.66	0.63	0.61	0.64	0.62	0.60	0.63	0.61	0.59	0.58
	4		0.72	0.69	0.67	0.71	0.69	0.66	0.64	0.67	0.65	0.64	0.66	0.64	0.63	0.61
光源	4		0.72	0.69	0.67	0.71	0.69	0.66	0.64	0.67	0.65	0.64	0.66	0.64	0.63	0.61
	5		0.73	0.71	0.69	0.72	0.70	0.69	0.67	0.69	0.67	0.66	0.67	0.66	0.65	0.63
	7		0.75	0.73	0.72	0.74	0.72	0.71	0.70	0.71	0.70	0.69	0.69	0.69	0.68	0.66
光束	10		0.76	0.75	0.74	0.75	0.74	0.73	0.73	0.73	0.72	0.71	0.71	0.71	0.70	0.68

器具効率 Ft=			71.4%
上方光束 Fu=			0.0%
下方光束 Fd=			71.4%
配光分類			
BZ-			
最大取付間隔			
A-A		1.94	H
B-B		1.28	H
保守率	良	0.73	
	中	0.69	
	否	0.61	
光度 (cd/1000 lm)			

単体照度分布(初期)

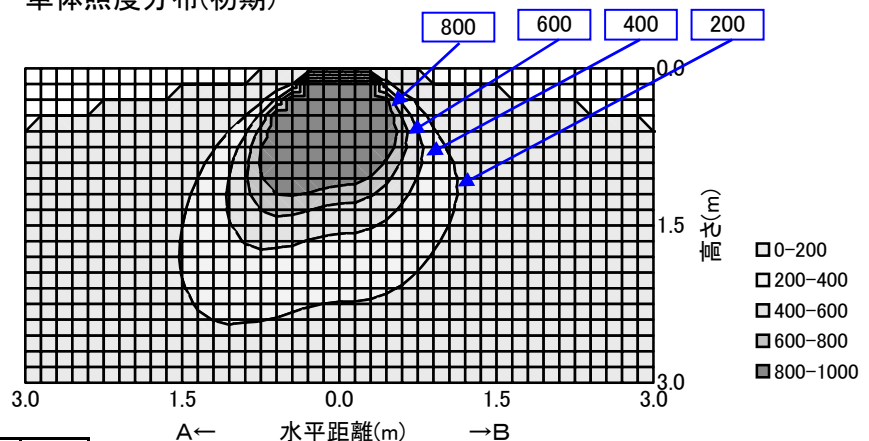

配光曲線

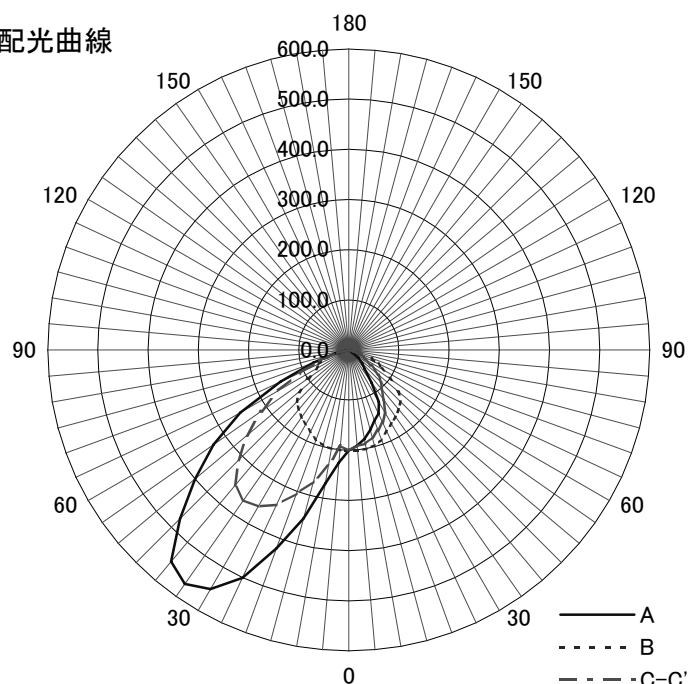

	A-0	B-B	C-0	A'-0	C'-0
0	200	200	200	200	200
10	270	200	235	180	190
20	420	190	305	150	170
30	550	170	360	120	145
40	550	155	352	50	102
50	400	130	265	25	77
60	250	75	162		37
70	75	50	62		25
80					
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					