
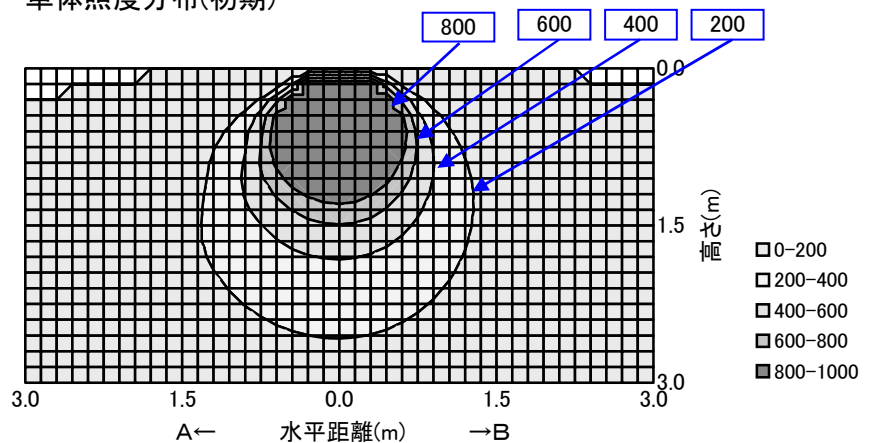


日立照明器具 照明特性

形式: HTM4142-MEU14 〈高出力形〉	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
	床	10%														0%	
室指数		照明率 S/H=1.0															
姿図 			照明率 S/H=1.0														
	0.6		0.47	0.37	0.31	0.46	0.37	0.31	0.27	0.36	0.30	0.26	0.35	0.30	0.26	0.25	
	0.8		0.55	0.46	0.39	0.54	0.45	0.39	0.35	0.44	0.39	0.35	0.43	0.38	0.34	0.33	
	1		0.60	0.52	0.46	0.59	0.51	0.45	0.41	0.50	0.45	0.41	0.49	0.44	0.40	0.38	
	1.25		0.65	0.58	0.52	0.64	0.57	0.51	0.47	0.55	0.51	0.47	0.54	0.50	0.46	0.44	
	1.5		0.69	0.62	0.57	0.68	0.61	0.56	0.52	0.60	0.55	0.52	0.58	0.54	0.51	0.49	
	2		0.74	0.68	0.63	0.72	0.67	0.63	0.59	0.65	0.62	0.58	0.64	0.61	0.58	0.56	
	2.5		0.77	0.72	0.67	0.75	0.71	0.67	0.63	0.69	0.66	0.63	0.67	0.64	0.62	0.60	
	3		0.78	0.74	0.70	0.77	0.73	0.70	0.67	0.71	0.68	0.66	0.70	0.67	0.65	0.63	
	光源		4	0.81	0.77	0.74	0.80	0.76	0.74	0.71	0.75	0.72	0.70	0.73	0.71	0.69	0.67
品名		Hf形蛍光ランプ	5	0.82	0.80	0.77	0.81	0.79	0.76	0.74	0.77	0.75	0.73	0.75	0.73	0.70	
形式		FHF32EX-N-H	7	0.84	0.82	0.80	0.83	0.81	0.80	0.78	0.80	0.78	0.77	0.78	0.77	0.73	
光束		4,950 lm	10	0.86	0.84	0.83	0.85	0.83	0.82	0.81	0.82	0.81	0.80	0.80	0.79	0.76	

器具効率 Ft= 81.4%			
上方光束 Fu= 0.0%			
下方光束 Fd= 81.4%			
配光分類			
BZ-			
最大取付間隔			
A-A	1.40	H	
B-B	1.28	H	
保守率	良	0.73	
	中	0.69	
	否	0.61	
光度 (cd/1000 lm)			
	A-0	B-B	C-0
0	268	268	268
10	267	264	265
20	260	251	257
30	247	230	240
40	224	203	216
50	169	170	183
60	139	128	138
70	69	83	82
80	12	31	20
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)



配光曲線

