


## 日立照明器具 照明特性

| 形式：HTM4170A-EU14+HBC4172                                                                        |             | 天井<br>反射率<br>室指数 | 80%         |      |      | 70%  |      |      |      | 50%  |      |      | 30%  |      |      | 0%   |    |
|-------------------------------------------------------------------------------------------------|-------------|------------------|-------------|------|------|------|------|------|------|------|------|------|------|------|------|------|----|
| <高出力形>                                                                                          |             |                  | 壁           | 70%  | 50%  | 30%  | 70%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0% |
|                                                                                                 |             |                  | 床           | 10%  |      |      |      |      |      |      |      |      |      |      |      |      |    |
|                                                                                                 |             |                  | 照明率 S/H=1.0 |      |      |      |      |      |      |      |      |      |      |      |      |      |    |
| <div>姿図</div>  |             | 0.6              | 0.36        | 0.29 | 0.25 | 0.35 | 0.29 | 0.25 | 0.22 | 0.28 | 0.24 | 0.22 | 0.28 | 0.24 | 0.22 | 0.21 |    |
|                                                                                                 |             | 0.8              | 0.42        | 0.36 | 0.31 | 0.41 | 0.35 | 0.31 | 0.28 | 0.34 | 0.31 | 0.28 | 0.34 | 0.30 | 0.28 | 0.27 |    |
|                                                                                                 |             | 1                | 0.46        | 0.40 | 0.36 | 0.45 | 0.39 | 0.36 | 0.33 | 0.39 | 0.35 | 0.32 | 0.38 | 0.35 | 0.32 | 0.31 |    |
|                                                                                                 |             | 1.25             | 0.49        | 0.44 | 0.40 | 0.48 | 0.43 | 0.40 | 0.37 | 0.42 | 0.39 | 0.37 | 0.41 | 0.39 | 0.36 | 0.35 |    |
|                                                                                                 |             | 1.5              | 0.51        | 0.47 | 0.43 | 0.51 | 0.46 | 0.43 | 0.40 | 0.45 | 0.42 | 0.40 | 0.44 | 0.42 | 0.40 | 0.38 |    |
|                                                                                                 |             | 2                | 0.55        | 0.51 | 0.48 | 0.54 | 0.50 | 0.47 | 0.45 | 0.49 | 0.47 | 0.45 | 0.48 | 0.46 | 0.44 | 0.43 |    |
|                                                                                                 |             | 2.5              | 0.56        | 0.53 | 0.50 | 0.55 | 0.53 | 0.50 | 0.48 | 0.51 | 0.49 | 0.47 | 0.50 | 0.48 | 0.47 | 0.45 |    |
|                                                                                                 |             | 3                | 0.58        | 0.55 | 0.52 | 0.57 | 0.54 | 0.52 | 0.50 | 0.53 | 0.51 | 0.49 | 0.52 | 0.50 | 0.49 | 0.47 |    |
| 光源                                                                                              |             | 4                | 0.59        | 0.57 | 0.55 | 0.58 | 0.56 | 0.54 | 0.53 | 0.55 | 0.53 | 0.52 | 0.54 | 0.52 | 0.51 | 0.50 |    |
| 品名                                                                                              | Hf蛍光ランプ     | 5                | 0.60        | 0.58 | 0.57 | 0.59 | 0.58 | 0.56 | 0.55 | 0.56 | 0.55 | 0.54 | 0.55 | 0.54 | 0.53 | 0.51 |    |
| 形式                                                                                              | FHF32EX-N-H | 7                | 0.61        | 0.60 | 0.59 | 0.61 | 0.59 | 0.58 | 0.57 | 0.58 | 0.57 | 0.56 | 0.57 | 0.56 | 0.55 | 0.54 |    |
| 光束                                                                                              | 4,950 lm    | 10               | 0.62        | 0.62 | 0.61 | 0.62 | 0.61 | 0.60 | 0.59 | 0.60 | 0.59 | 0.58 | 0.58 | 0.58 | 0.57 | 0.56 |    |

器具効率 Ft= 58.9%  
 上方光束 Fu= 0.0%  
 下方光束 Fd= 58.9%

### 配光分類

BZ-

### 最大取付間隔

A-A 1.44 H


B-B 1.20 H

| 保守率 | 良    | 中    | 否    |
|-----|------|------|------|
|     | 0.74 | 0.70 | 0.62 |

### 光度 (cd/1000 lm)

|     | A-0 | B-B | C-0 |
|-----|-----|-----|-----|
| 0   | 224 | 224 | 224 |
| 10  | 223 | 221 | 223 |
| 20  | 224 | 203 | 214 |
| 30  | 219 | 180 | 199 |
| 40  | 191 | 151 | 180 |
| 50  | 126 | 118 | 137 |
| 60  | 63  | 77  | 80  |
| 70  | 32  | 39  | 34  |
| 80  | 13  | 14  | 13  |
| 90  |     |     |     |
| 100 |     |     |     |
| 110 |     |     |     |
| 120 |     |     |     |
| 130 |     |     |     |
| 140 |     |     |     |
| 150 |     |     |     |
| 160 |     |     |     |
| 170 |     |     |     |
| 180 |     |     |     |

### 単体照度分布(初期)

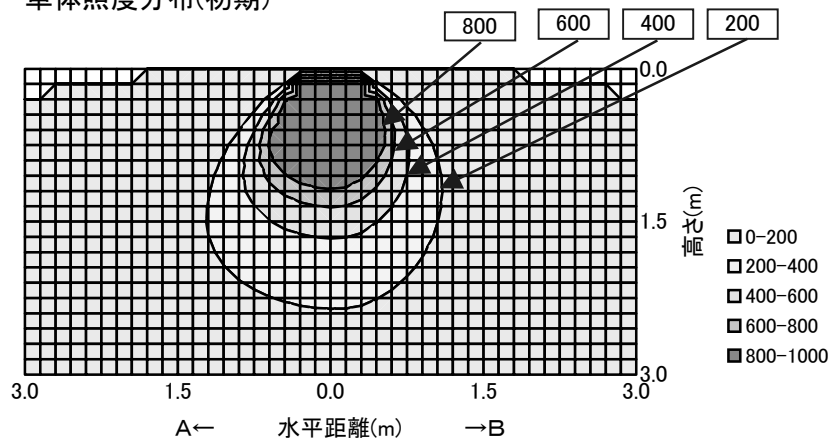

### 配光曲線

