


日立照明器具 照明特性

形式： HTM4170A-EU14+HBC4174			反 射 率	天井	80%			70%				50%			30%			0%
<高出力形>				壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
				床	10%													
				室指数	照明率 S/H=1.0													
姿図 			0.6	0.35	0.29	0.25	0.34	0.29	0.25	0.23	0.28	0.25	0.22	0.28	0.25	0.22	0.21	
			0.8	0.41	0.36	0.32	0.40	0.35	0.32	0.29	0.35	0.31	0.29	0.34	0.31	0.29	0.28	
			1	0.44	0.40	0.37	0.44	0.39	0.36	0.34	0.39	0.36	0.34	0.38	0.36	0.34	0.33	
			1.25	0.47	0.43	0.40	0.47	0.43	0.40	0.38	0.42	0.40	0.38	0.41	0.39	0.37	0.36	
			1.5	0.50	0.46	0.43	0.49	0.46	0.43	0.41	0.45	0.43	0.41	0.44	0.42	0.40	0.39	
			2	0.52	0.49	0.47	0.51	0.49	0.47	0.45	0.48	0.46	0.45	0.47	0.45	0.44	0.43	
			2.5	0.53	0.51	0.49	0.53	0.51	0.49	0.47	0.50	0.48	0.47	0.49	0.47	0.46	0.45	
			3	0.54	0.52	0.50	0.54	0.52	0.50	0.49	0.51	0.49	0.48	0.50	0.48	0.47	0.46	
光源			4	0.55	0.54	0.52	0.55	0.53	0.52	0.51	0.52	0.51	0.50	0.51	0.50	0.49	0.48	
品名	Hf蛍光ランプ ^o		5	0.56	0.55	0.54	0.56	0.54	0.53	0.52	0.53	0.52	0.52	0.52	0.51	0.51	0.49	
形式	FHF32EX-N-H		7	0.57	0.57	0.56	0.57	0.56	0.55	0.55	0.55	0.54	0.54	0.54	0.53	0.53	0.51	
光束	4,950 lm		10	0.58	0.58	0.57	0.58	0.57	0.57	0.56	0.56	0.56	0.55	0.55	0.55	0.54	0.53	

器具効率 Ft= 54.3%			
上方光束 Fu= 0.0%			
下方光束 Fd= 54.3%			
配光分類			
BZ-			
最大取付間隔			
A-A		1.90	H
B-B		1.24	H
保守率	良	0.74	
	中	0.70	
	否	0.62	
光 度 (cd/1000 lm)			
	A-0	B-B	C-0
0	191	191	191
10	211	183	196
20	247	172	211
30	302	158	234
40	297	128	234
50	162	78	149
60	31	10	29
70	2	2	2
80	1		1
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

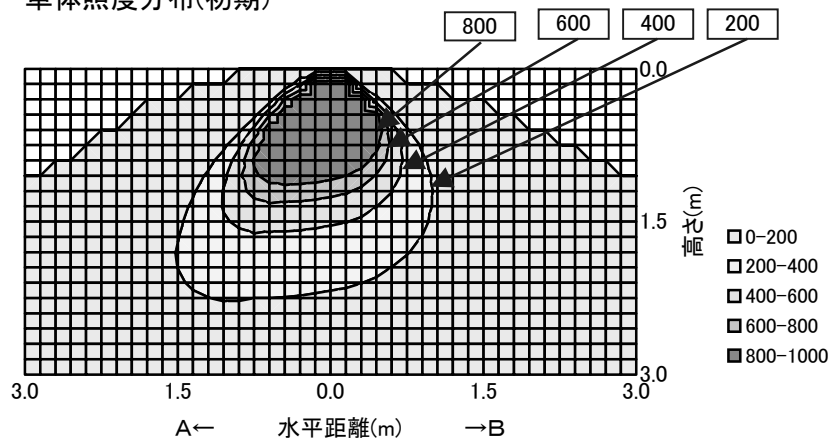

配光曲線

