

日立照明器具 照明特性

形式： HTM4170A-EU14+HBC4175		反 射 率	天井	80%			70%				50%			30%			0%
<高出力形>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													
			室指数	照明率 S/H=1.0													
姿図 	0.6	0.31	0.25	0.22	0.30	0.25	0.22	0.20	0.25	0.22	0.20	0.24	0.22	0.20	0.19		
	0.8	0.35	0.31	0.27	0.35	0.30	0.27	0.25	0.30	0.27	0.25	0.29	0.27	0.25	0.24		
	1	0.38	0.34	0.31	0.38	0.34	0.31	0.28	0.33	0.30	0.28	0.32	0.30	0.28	0.27		
	1.25	0.41	0.37	0.34	0.40	0.37	0.34	0.32	0.36	0.33	0.31	0.35	0.33	0.31	0.30		
	1.5	0.43	0.39	0.37	0.42	0.39	0.36	0.34	0.38	0.36	0.34	0.37	0.35	0.34	0.33		
	2	0.45	0.42	0.40	0.45	0.42	0.40	0.38	0.41	0.39	0.38	0.40	0.39	0.37	0.36		
	2.5	0.47	0.44	0.42	0.46	0.44	0.42	0.40	0.43	0.41	0.40	0.42	0.40	0.39	0.38		
	3	0.47	0.45	0.43	0.47	0.45	0.43	0.42	0.44	0.42	0.41	0.43	0.42	0.41	0.39		
光 源		4	0.49	0.47	0.45	0.48	0.46	0.45	0.44	0.45	0.44	0.43	0.44	0.43	0.42	0.41	
品名	Hf蛍光ランプ	5	0.49	0.48	0.47	0.49	0.47	0.46	0.45	0.46	0.45	0.45	0.45	0.45	0.44	0.43	
形式	FHF32EX-N-H	7	0.50	0.49	0.49	0.50	0.49	0.48	0.47	0.48	0.47	0.47	0.47	0.46	0.46	0.44	
光束	4,950 lm	10	0.51	0.51	0.50	0.51	0.50	0.50	0.49	0.49	0.49	0.48	0.48	0.48	0.47	0.46	

器具効率 $F_t = 48.2\%$
 上方光束 $F_u = 0.0\%$
 下方光束 $F_d = 48.2\%$


配光分類
BZ-

最大取付間隔
 A-A 1.44 H
 B-B 1.04 H

保守率
 良 0.74
 中 0.70
 否 0.62

光度 (cd/1000 lm)			
	A-0	B-B	C-0
0	219	219	219
10	219	206	215
20	217	180	198
30	213	148	174
40	186	115	144
50	122	68	99
60	59	34	47
70	33	20	24
80	11	8	10
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

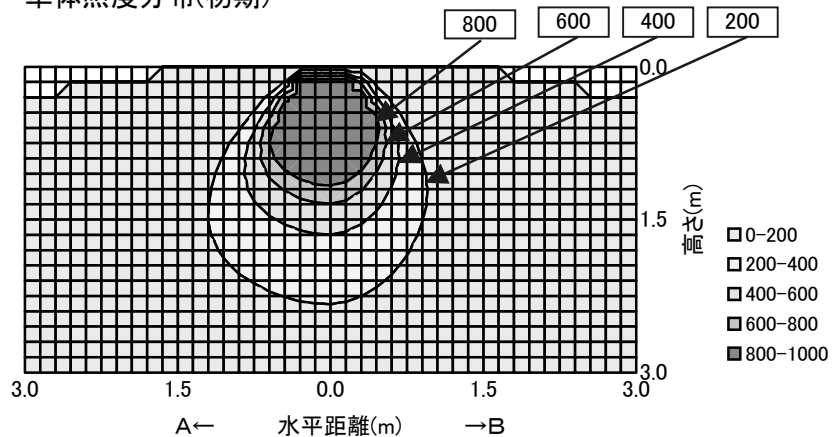

配光曲線

