

日立照明器具 照明特性

形式： HTM4170A-EU14		反 射 率	天井	80%			70%				50%			30%			0%		
＜高出力形＞			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数																照明率 S/H=1.0
姿図 		0.6	0.42	0.33	0.27	0.41	0.32	0.27	0.23	0.32	0.26	0.23	0.31	0.26	0.23	0.21			
		0.8	0.49	0.41	0.35	0.48	0.40	0.35	0.30	0.39	0.34	0.30	0.38	0.34	0.30	0.29			
		1	0.54	0.46	0.41	0.53	0.46	0.40	0.36	0.44	0.40	0.36	0.43	0.39	0.36	0.34			
		1.25	0.59	0.52	0.46	0.58	0.51	0.46	0.42	0.50	0.45	0.41	0.48	0.44	0.41	0.39			
		1.5	0.62	0.56	0.51	0.61	0.55	0.50	0.47	0.54	0.50	0.46	0.52	0.49	0.46	0.44			
		2	0.67	0.61	0.57	0.66	0.61	0.56	0.53	0.59	0.55	0.52	0.58	0.55	0.52	0.50			
		2.5	0.69	0.65	0.61	0.68	0.64	0.60	0.57	0.62	0.59	0.56	0.61	0.58	0.56	0.54			
		3	0.71	0.67	0.64	0.70	0.66	0.63	0.60	0.65	0.62	0.59	0.63	0.61	0.58	0.57			
光 源		4	0.73	0.70	0.67	0.72	0.69	0.67	0.64	0.68	0.65	0.63	0.66	0.64	0.62	0.60			
品名	Hf形蛍光ランプ ^o	5	0.75	0.72	0.70	0.74	0.71	0.69	0.67	0.70	0.68	0.66	0.68	0.66	0.65	0.63			
形式	FHF32EX-N-H	7	0.77	0.75	0.73	0.76	0.74	0.72	0.71	0.72	0.71	0.70	0.71	0.69	0.68	0.66			
光束	4,950 lm	10	0.78	0.77	0.75	0.77	0.76	0.75	0.74	0.74	0.73	0.72	0.73	0.72	0.71	0.69			

器具効率 Ft= 74.0%

上方光束 Fu= 0.0%

下方光束 Fd= 74.0%

配光分類

BZ-

最大取付間隔

A-A 1.52 H


B-B 1.28 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	225	225	225
10	226	219	223
20	224	208	215
30	221	191	205
40	217	168	193
50	197	139	177
60	138	103	143
70	59	65	79
80	14	31	19
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

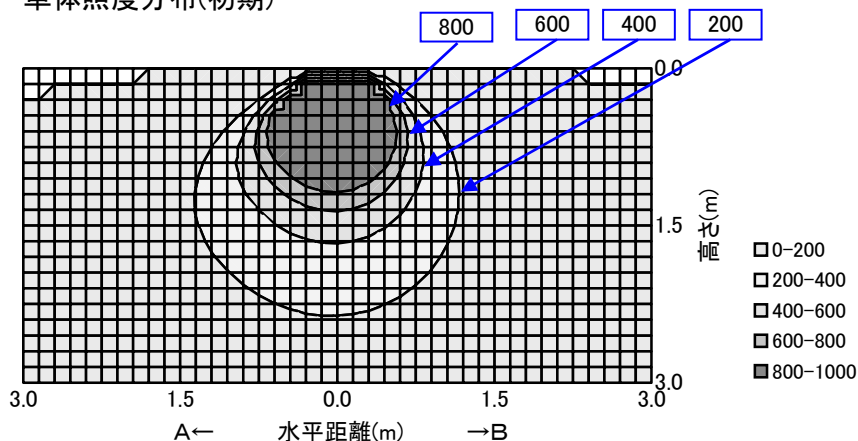

配光曲線

