

日立照明器具 照明特性

形式： HTM4122A-MEU14		反 射 率	天井	80%			70%				50%			30%			0%		
＜高出力形＞			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図 		0.6	0.47	0.37	0.30	0.46	0.36	0.30	0.26	0.35	0.30	0.26	0.35	0.29	0.25	0.24			
		0.8	0.55	0.46	0.39	0.54	0.45	0.39	0.34	0.44	0.38	0.34	0.43	0.37	0.34	0.32			
		1	0.61	0.52	0.45	0.59	0.51	0.45	0.40	0.50	0.44	0.40	0.48	0.43	0.39	0.38			
		1.25	0.66	0.58	0.51	0.64	0.57	0.51	0.46	0.55	0.50	0.46	0.54	0.49	0.46	0.44			
		1.5	0.70	0.62	0.56	0.68	0.61	0.56	0.52	0.60	0.55	0.51	0.58	0.54	0.51	0.49			
		2	0.75	0.68	0.63	0.73	0.68	0.63	0.59	0.66	0.62	0.58	0.64	0.61	0.58	0.56			
		2.5	0.77	0.72	0.68	0.76	0.71	0.67	0.64	0.70	0.66	0.63	0.68	0.65	0.62	0.60			
		3	0.79	0.75	0.71	0.78	0.74	0.70	0.67	0.72	0.69	0.66	0.70	0.68	0.65	0.63			
光 源		4	0.82	0.78	0.75	0.81	0.77	0.74	0.72	0.76	0.73	0.71	0.74	0.72	0.70	0.67			
品名	Hf形蛍光ランプ ^o	5	0.84	0.81	0.78	0.83	0.80	0.77	0.75	0.78	0.76	0.74	0.76	0.74	0.73	0.70			
形式	FHF32EX-N-H	7	0.86	0.84	0.82	0.85	0.83	0.81	0.79	0.81	0.79	0.78	0.79	0.78	0.76	0.74			
光束	4,950 lm	10	0.87	0.86	0.84	0.86	0.85	0.84	0.82	0.83	0.82	0.81	0.81	0.80	0.79	0.77			

器具効率 Ft= 83.0%

上方光束 Fu= 0.0%

下方光束 Fd= 83.0%

配光分類

BZ-

最大取付間隔

A-A 1.46 H

B-B 1.28 H

保守率


良
中
否

0.73
0.69
0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	253	253	253
10	256	248	251
20	253	237	245
30	245	216	231
40	230	189	212
50	205	154	186
60	164	113	149
70	95	69	103
80	16	24	28
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

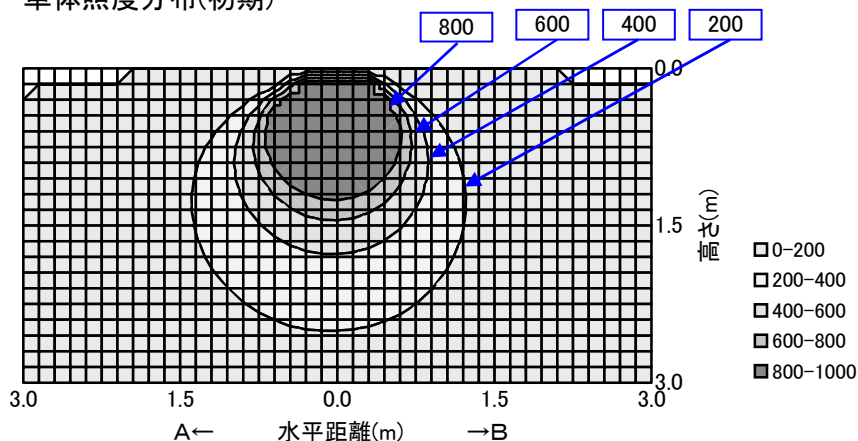

配光曲線

