

日立照明器具 照明特性

形式： HTM4222V-PKU14		反 射 率	天井	80%			70%				50%			30%			0%		
<高出力形> <初期照度補正形>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
	0.6	0.47	0.38	0.32	0.46	0.37	0.32	0.28	0.36	0.31	0.28	0.36	0.31	0.28	0.26				
	0.8	0.54	0.46	0.40	0.53	0.45	0.40	0.36	0.44	0.40	0.36	0.43	0.39	0.36	0.34				
	1	0.59	0.52	0.46	0.58	0.51	0.46	0.42	0.50	0.45	0.42	0.49	0.45	0.41	0.40				
	1.25	0.64	0.57	0.52	0.63	0.56	0.51	0.48	0.55	0.51	0.47	0.54	0.50	0.47	0.45				
	1.5	0.67	0.61	0.56	0.66	0.60	0.56	0.52	0.59	0.55	0.52	0.58	0.54	0.51	0.50				
	2	0.71	0.66	0.62	0.70	0.66	0.62	0.58	0.64	0.61	0.58	0.63	0.60	0.57	0.55				
	2.5	0.74	0.69	0.66	0.73	0.69	0.65	0.62	0.67	0.64	0.62	0.66	0.63	0.61	0.59				
	3	0.75	0.72	0.68	0.74	0.71	0.68	0.65	0.69	0.67	0.64	0.68	0.65	0.63	0.61				
光源		4	0.78	0.75	0.72	0.76	0.74	0.71	0.69	0.72	0.70	0.68	0.70	0.69	0.67	0.65			
品名	Hf蛍光ランプ	5	0.79	0.77	0.74	0.78	0.76	0.74	0.72	0.74	0.72	0.71	0.72	0.71	0.69	0.67			
形式	FHF32EX-N-H	7	0.81	0.79	0.77	0.80	0.78	0.77	0.75	0.76	0.75	0.74	0.75	0.74	0.73	0.71			
光束	9,900 lm	10	0.82	0.81	0.80	0.81	0.80	0.79	0.78	0.78	0.77	0.77	0.77	0.76	0.75	0.73			

器具効率 $F_t = 77.6\%$
 上方光束 $F_u = 0.0\%$
 下方光束 $F_d = 77.6\%$

配光分類
BZ-


最大取付間隔
 A-A 1.36 H
 B-B 1.26 H

保守率
 良 0.73
 中 0.69
 否 0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	286	286	286
10	288	278	282
20	281	265	272
30	265	242	254
40	220	208	225
50	151	176	184
60	79	132	107
70	35	81	44
80	17	32	17
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

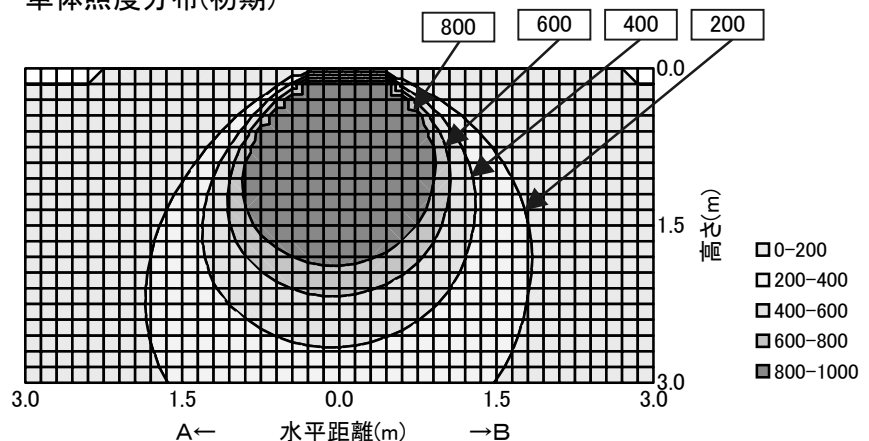

配光曲線

