

日立照明器具 照明特性

形式: HTM4241-MEN14		天井	80%			70%				50%			30%			0%
<定格出力形>		反射率	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		壁														
		床	10%													
		室指数	照明率 S/H=1.0													
姿図 	光源	0.6	0.47	0.36	0.30	0.46	0.36	0.29	0.25	0.35	0.29	0.25	0.34	0.28	0.24	0.23
		0.8	0.55	0.45	0.38	0.54	0.44	0.38	0.33	0.43	0.37	0.32	0.42	0.36	0.32	0.30
		1	0.61	0.51	0.44	0.60	0.50	0.44	0.39	0.49	0.43	0.38	0.48	0.42	0.38	0.36
		1.25	0.66	0.57	0.50	0.65	0.56	0.50	0.45	0.55	0.49	0.45	0.53	0.48	0.44	0.42
		1.5	0.70	0.62	0.56	0.69	0.61	0.55	0.50	0.59	0.54	0.50	0.58	0.53	0.49	0.47
		2	0.75	0.69	0.63	0.74	0.68	0.62	0.58	0.66	0.61	0.57	0.64	0.60	0.57	0.54
		2.5	0.79	0.73	0.68	0.77	0.72	0.67	0.63	0.70	0.66	0.62	0.68	0.64	0.61	0.59
		3	0.81	0.75	0.71	0.79	0.74	0.70	0.67	0.72	0.69	0.66	0.71	0.68	0.65	0.62
		4	0.84	0.79	0.76	0.82	0.78	0.75	0.72	0.76	0.73	0.71	0.74	0.72	0.70	0.67
		5	0.85	0.82	0.79	0.84	0.81	0.78	0.75	0.79	0.76	0.74	0.77	0.75	0.73	0.71
品名	Hf蛍光ランプ	7	0.88	0.85	0.83	0.87	0.84	0.82	0.80	0.82	0.80	0.79	0.80	0.79	0.77	0.75
形式	FHF32EX-N-H	10	0.89	0.88	0.86	0.88	0.87	0.85	0.84	0.85	0.83	0.82	0.83	0.82	0.81	0.78
光束	7,040 lm															

器具効率 Ft= 85.7%

上方光束 Fu= 0.0%

下方光束 Fd= 85.7%

配光分類

BZ-

最大取付間隔

A-A 1.46 H


B-B 1.28 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	241	241	241
10	240	237	239
20	238	225	231
30	233	205	220
40	222	179	205
50	204	147	182
60	176	109	153
70	130	67	117
80	61	24	61
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

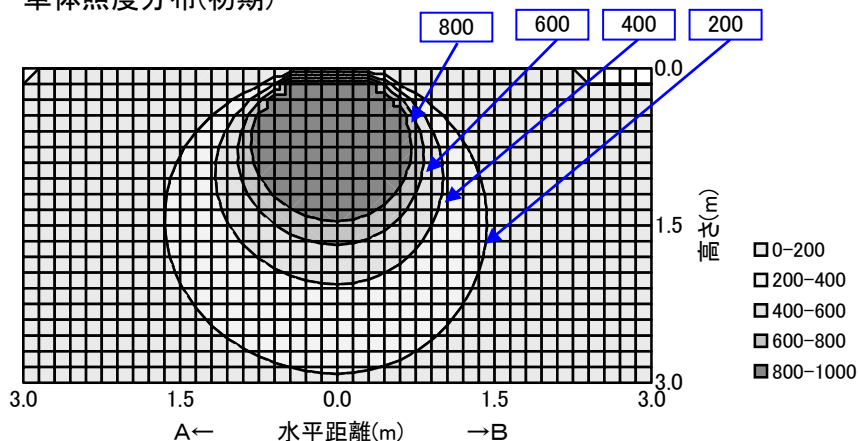

配光曲線

