


日立照明器具 照明特性

形式: HTM4242-MEN14		天井	80%			70%				50%			30%			0%
<定格出力形>		反射率	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		壁														
		床	10%													
		室指数	照明率 S/H=1.0													
姿図 	光源	0.6	0.46	0.36	0.29	0.45	0.35	0.29	0.25	0.34	0.29	0.25	0.34	0.29	0.25	0.23
		0.8	0.54	0.44	0.38	0.52	0.44	0.37	0.33	0.42	0.37	0.33	0.41	0.36	0.33	0.31
		1	0.59	0.50	0.44	0.58	0.49	0.43	0.39	0.48	0.43	0.39	0.47	0.42	0.38	0.36
		1.25	0.64	0.56	0.50	0.63	0.55	0.49	0.45	0.54	0.49	0.45	0.52	0.48	0.44	0.42
		1.5	0.68	0.60	0.55	0.66	0.60	0.54	0.50	0.58	0.53	0.49	0.56	0.52	0.49	0.47
		2	0.72	0.66	0.61	0.71	0.65	0.61	0.57	0.64	0.60	0.56	0.62	0.59	0.56	0.54
		2.5	0.75	0.70	0.66	0.74	0.69	0.65	0.62	0.67	0.64	0.61	0.66	0.63	0.60	0.58
		3	0.77	0.73	0.69	0.76	0.72	0.68	0.65	0.70	0.67	0.64	0.68	0.65	0.63	0.61
		4	0.80	0.76	0.73	0.78	0.75	0.72	0.69	0.73	0.71	0.68	0.71	0.69	0.67	0.65
		5	0.81	0.78	0.76	0.80	0.77	0.75	0.73	0.76	0.73	0.71	0.74	0.72	0.70	0.68
品名	Hf蛍光ランプ	7	0.83	0.81	0.79	0.82	0.80	0.78	0.77	0.78	0.77	0.75	0.77	0.75	0.74	0.72
形式	FHF32EX-N-H	10	0.85	0.83	0.82	0.84	0.82	0.81	0.80	0.81	0.79	0.78	0.79	0.78	0.77	0.75
光束	7,040 lm															

器具効率 Ft= 80.7%

上方光束 Fu= 0.0%

下方光束 Fd= 80.7%

配光分類

BZ-

最大取付間隔

A-A 1.42 H


B-B 1.28 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	248	248	248
10	247	244	246
20	243	232	238
30	234	213	224
40	219	186	205
50	195	153	179
60	149	114	143
70	92	71	93
80	24	26	35
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

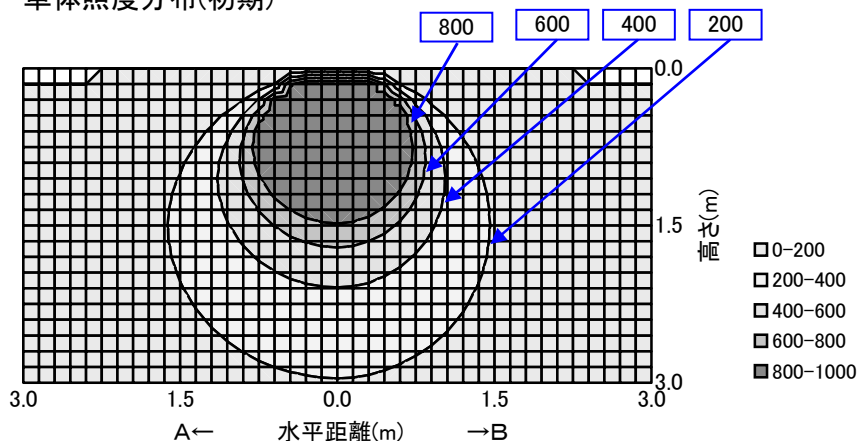

配光曲線

