

日立照明器具 照明特性

形式： HTM5101V-PK14			反 射 率	天井	80%			70%				50%			30%			0%	
ハイスリムe5				壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
〈初期照度補正機能付〉				床	10%														0%
				室指数	照明率 S/H=1.0														
姿図 			0.6	0.42	0.34	0.29	0.41	0.34	0.29	0.25	0.33	0.28	0.25	0.32	0.28	0.25	0.24		
			0.8	0.49	0.41	0.36	0.48	0.41	0.36	0.32	0.40	0.36	0.32	0.39	0.35	0.32	0.31		
			1	0.54	0.47	0.42	0.53	0.46	0.41	0.38	0.45	0.41	0.37	0.44	0.40	0.37	0.36		
			1.25	0.58	0.51	0.47	0.57	0.51	0.46	0.43	0.50	0.46	0.42	0.48	0.45	0.42	0.41		
			1.5	0.61	0.55	0.51	0.60	0.54	0.50	0.47	0.53	0.49	0.47	0.52	0.49	0.46	0.45		
			2	0.65	0.60	0.56	0.64	0.59	0.56	0.53	0.58	0.55	0.52	0.56	0.54	0.52	0.50		
			2.5	0.67	0.63	0.59	0.66	0.62	0.59	0.56	0.61	0.58	0.55	0.59	0.57	0.55	0.53		
			3	0.68	0.65	0.62	0.67	0.64	0.61	0.59	0.62	0.60	0.58	0.61	0.59	0.57	0.55		
			光源		4	0.70	0.67	0.65	0.69	0.67	0.64	0.62	0.65	0.63	0.61	0.64	0.62	0.60	0.59
品名	ハイスリムUV	5	0.71	0.69	0.67	0.71	0.68	0.66	0.65	0.67	0.65	0.64	0.65	0.64	0.63	0.61			
形式	FHF45S・EN-V	7	0.73	0.71	0.70	0.72	0.71	0.69	0.68	0.69	0.68	0.67	0.68	0.67	0.66	0.64			
光束	4,950 lm	10	0.74	0.73	0.72	0.73	0.72	0.72	0.71	0.71	0.70	0.69	0.69	0.69	0.68	0.66			

器具効率 $F_t = 70.4\%$
 上方光束 $F_u = 0.0\%$
 下方光束 $F_d = 70.4\%$

配光分類

BZ-

最大取付間隔

A-A 1.38 H


B-B 1.26 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	252	252	252
10	254	246	252
20	253	234	246
30	238	212	232
40	199	181	208
50	133	149	166
60	74	112	102
70	38	67	45
80	20	26	19
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

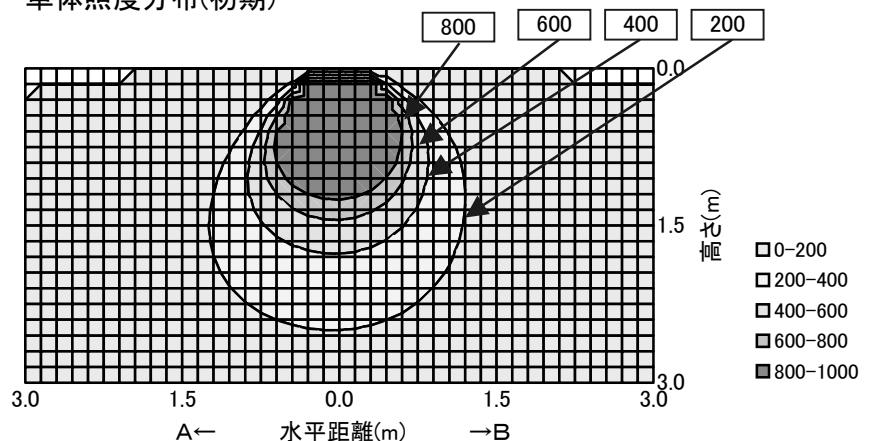

配光曲線

