

日立照明器具 照明特性

形式： HTM5220V-PK14		反 射 率	天井			80%				70%				50%			30%			0%
ハイスリムe5 〈初期照度補正機能付〉			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
			床	10%															0%	
		室指数	照明率 S/H=1.0																	
		0.6	0.49	0.38	0.32	0.48	0.38	0.32	0.27	0.37	0.31	0.27	0.36	0.31	0.27	0.25				
		0.8	0.57	0.47	0.41	0.56	0.47	0.40	0.36	0.45	0.40	0.35	0.44	0.39	0.35	0.33				
		1	0.63	0.53	0.47	0.61	0.53	0.46	0.42	0.51	0.46	0.41	0.50	0.45	0.41	0.39				
		1.25	0.68	0.59	0.53	0.66	0.59	0.53	0.48	0.57	0.52	0.48	0.56	0.51	0.47	0.45				
		1.5	0.71	0.64	0.58	0.70	0.63	0.58	0.53	0.61	0.57	0.53	0.60	0.56	0.52	0.50				
		2	0.76	0.70	0.65	0.75	0.69	0.64	0.61	0.67	0.63	0.60	0.66	0.62	0.59	0.57				
		2.5	0.79	0.74	0.69	0.78	0.73	0.69	0.65	0.71	0.68	0.64	0.69	0.66	0.64	0.61				
		3	0.81	0.77	0.72	0.80	0.76	0.72	0.69	0.74	0.70	0.68	0.72	0.69	0.67	0.64				
光 源		4	0.84	0.80	0.77	0.83	0.79	0.76	0.73	0.77	0.75	0.72	0.75	0.73	0.71	0.69				
品名	ハイスリムUV	5	0.85	0.82	0.80	0.84	0.81	0.79	0.77	0.80	0.77	0.75	0.78	0.76	0.74	0.72				
形式	FHF45S・EN-V	7	0.88	0.85	0.83	0.86	0.84	0.82	0.81	0.82	0.81	0.79	0.81	0.79	0.78	0.76				
光束	9,900 lm	10	0.89	0.88	0.86	0.88	0.87	0.85	0.84	0.85	0.84	0.83	0.83	0.82	0.81	0.79				

器具効率 $F_t = 84.8\%$
 上方光束 $F_u = 0.0\%$
 下方光束 $F_d = 84.8\%$

配光分類

BZ-

最大取付間隔

A-A 1.34 H


B-B 1.26 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	276	276	276
10	276	268	274
20	269	257	266
30	249	232	244
40	221	201	214
50	195	166	184
60	149	124	147
70	82	79	90
80	27	34	33
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

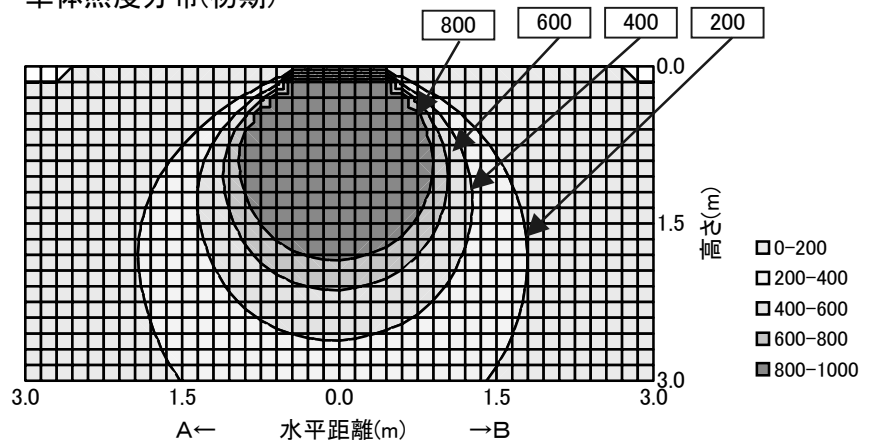

配光曲線

