



日立照明器具 照明特性

形式： HTP4212A-MEN14		反 射 率	天井			80%				70%				50%			30%			0%
<定格出力形>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
			床	10%															0%	
			室指数	照明率 S/H=1.0															0%	
			0.6	0.34	0.27	0.23	0.34	0.27	0.22	0.19	0.26	0.22	0.19	0.25	0.22	0.19	0.18			
			0.8	0.40	0.33	0.28	0.39	0.33	0.28	0.25	0.32	0.28	0.25	0.31	0.27	0.24	0.23			
			1	0.44	0.37	0.33	0.43	0.37	0.32	0.29	0.36	0.32	0.29	0.35	0.31	0.28	0.27			
			1.25	0.47	0.41	0.37	0.46	0.41	0.37	0.33	0.40	0.36	0.33	0.38	0.35	0.33	0.31			
			1.5	0.50	0.45	0.40	0.49	0.44	0.40	0.37	0.43	0.39	0.36	0.41	0.38	0.36	0.34			
			2	0.53	0.49	0.45	0.52	0.48	0.45	0.42	0.47	0.44	0.41	0.45	0.43	0.41	0.39			
			2.5	0.55	0.52	0.48	0.54	0.51	0.48	0.45	0.49	0.47	0.44	0.48	0.46	0.44	0.42			
			3	0.57	0.53	0.50	0.56	0.53	0.50	0.47	0.51	0.49	0.47	0.50	0.48	0.46	0.44			
	光 源		4	0.59	0.56	0.53	0.58	0.55	0.53	0.51	0.53	0.52	0.50	0.52	0.50	0.49	0.47			
	品名	HF蛍光ランプ	5	0.60	0.58	0.55	0.59	0.57	0.55	0.53	0.55	0.53	0.52	0.54	0.52	0.51	0.49			
形式	FHF32EX-N-H	7	0.61	0.60	0.58	0.60	0.59	0.57	0.56	0.57	0.56	0.55	0.56	0.55	0.54	0.52				
光束	7,040 lm	10	0.63	0.61	0.60	0.62	0.61	0.59	0.59	0.59	0.58	0.57	0.57	0.57	0.57	0.56	0.54			

器具効率 Ft= 59.9%		
上方光束 Fu= 1.1%		
下方光束 Fd= 58.8%		
配光分類		
BZ-		
最大取付間隔		
A-A	1.28	H
B-B	1.24	H
保守率	良	0.69
	中	0.65
	否	0.61
光度 (cd/1000 lm)		
	A-0	B-B C-0
0	199	199 199
10	197	194 196
20	187	182 185
30	169	165 168
40	148	143 146
50	122	116 120
60	94	86 91
70	64	52 60
80	33	20 30
90	16	2 12
100	8	1 5
110	3	
120		
130		
140		
150		
160		
170		
180		

単体照度分布(初期)

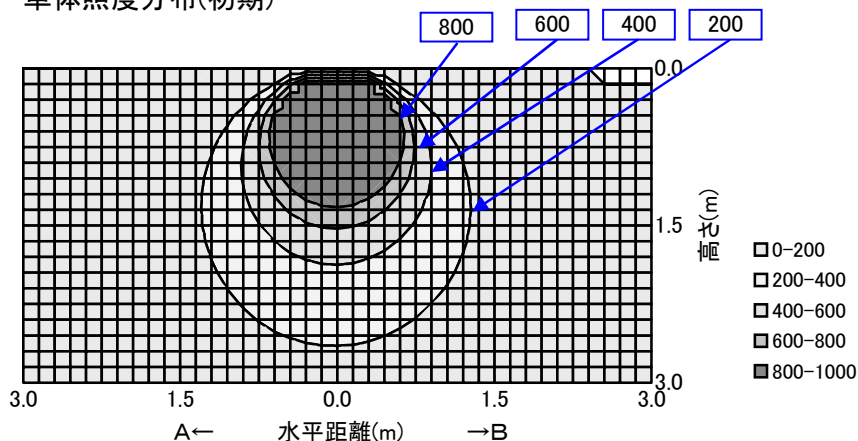

配光曲線

