

日立照明器具 照明特性

形式：HTP45401-EN14		反 射 率	天井	80%			70%				50%			30%			0%		
＜定格出力形＞			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図 		0.6	0.32	0.26	0.22	0.32	0.26	0.22	0.19	0.25	0.21	0.19	0.24	0.21	0.19	0.17			
		0.8	0.38	0.31	0.27	0.37	0.31	0.27	0.24	0.30	0.27	0.24	0.30	0.26	0.24	0.23			
		1	0.41	0.35	0.31	0.40	0.35	0.31	0.28	0.34	0.31	0.28	0.33	0.30	0.28	0.27			
		1.25	0.44	0.39	0.35	0.44	0.39	0.35	0.32	0.38	0.34	0.32	0.37	0.34	0.32	0.30			
		1.5	0.47	0.42	0.39	0.46	0.42	0.38	0.35	0.41	0.38	0.35	0.40	0.37	0.35	0.34			
		2	0.50	0.46	0.43	0.49	0.46	0.43	0.40	0.44	0.42	0.40	0.43	0.41	0.39	0.38			
		2.5	0.52	0.48	0.46	0.51	0.48	0.45	0.43	0.47	0.44	0.42	0.46	0.44	0.42	0.41			
		3	0.53	0.50	0.48	0.52	0.49	0.47	0.45	0.48	0.46	0.44	0.47	0.45	0.44	0.42			
光源		4	0.55	0.52	0.50	0.54	0.52	0.50	0.48	0.50	0.49	0.47	0.49	0.48	0.47	0.45			
品名	Hfコンパネ形蛍光ランプ	5	0.56	0.54	0.52	0.55	0.53	0.52	0.50	0.52	0.51	0.49	0.51	0.50	0.49	0.47			
形式	FHP45EN	7	0.57	0.56	0.54	0.56	0.55	0.54	0.53	0.54	0.53	0.52	0.53	0.52	0.51	0.49			
光束	17,400 lm	10	0.58	0.57	0.56	0.57	0.56	0.56	0.55	0.55	0.55	0.54	0.54	0.53	0.53	0.51			

器具効率 Ft= 55.1%

上方光束 Fu= 0.0%

下方光束 Fd= 55.1%

配光分類

BZ-

最大取付間隔

A-A 1.26 H

B-B 1.26 H

保守率


良
中
否

0.69
0.65
0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	198	198	198
10	195	194	194
20	183	182	183
30	166	167	165
40	142	140	142
50	115	116	116
60	86	85	84
70	52	52	53
80	18	18	19
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

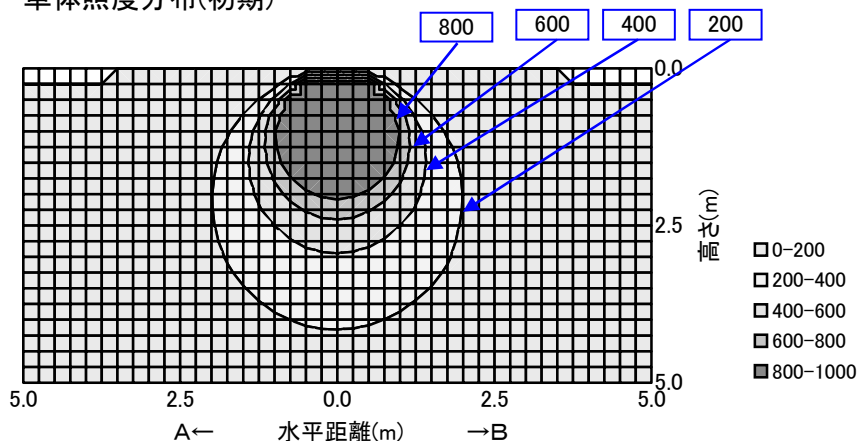

配光曲線

