

日立照明器具 照明特性

形式：HTP45402-EN14		反 射 率	天井		80%			70%				50%			30%			0%	
<定格出力形>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
		0.6	0.39	0.33	0.29	0.38	0.32	0.29	0.26	0.32	0.28	0.26	0.31	0.28	0.26	0.25			
		0.8	0.44	0.39	0.35	0.44	0.38	0.35	0.32	0.38	0.34	0.32	0.37	0.34	0.32	0.31			
		1	0.48	0.43	0.39	0.47	0.42	0.39	0.36	0.42	0.38	0.36	0.41	0.38	0.36	0.35			
		1.25	0.51	0.46	0.43	0.50	0.46	0.43	0.40	0.45	0.42	0.40	0.44	0.42	0.40	0.38			
		1.5	0.53	0.49	0.46	0.52	0.49	0.46	0.43	0.48	0.45	0.43	0.47	0.44	0.43	0.41			
		2	0.56	0.53	0.50	0.55	0.52	0.50	0.47	0.51	0.49	0.47	0.50	0.48	0.47	0.45			
		2.5	0.57	0.55	0.52	0.57	0.54	0.52	0.50	0.53	0.51	0.49	0.52	0.50	0.49	0.47			
		3	0.58	0.56	0.54	0.58	0.55	0.53	0.52	0.54	0.52	0.51	0.53	0.52	0.50	0.49			
光源		4	0.60	0.58	0.56	0.59	0.57	0.56	0.54	0.56	0.55	0.53	0.55	0.54	0.53	0.51			
品名	Hfコンパネ形蛍光ランプ	5	0.61	0.59	0.58	0.60	0.58	0.57	0.56	0.57	0.56	0.55	0.56	0.55	0.54	0.53			
形式	FHP45EN	7	0.62	0.61	0.60	0.61	0.60	0.59	0.58	0.59	0.58	0.57	0.58	0.57	0.56	0.55			
光束	17,400 lm	10	0.63	0.62	0.61	0.62	0.62	0.61	0.60	0.60	0.60	0.59	0.59	0.59	0.58	0.57			

器具効率 Ft= 59.1%

上方光束 Fu= 0.0%

下方光束 Fd= 59.1%

配光分類

BZ-

最大取付間隔

A-A 1.22 H


B-B 1.20 H

保守率	良	0.69
	中	0.65
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	291	291	291
10	289	286	286
20	275	267	270
30	243	234	237
40	168	181	179
50	101	105	102
60	62	60	42
70	32	32	19
80	11	12	14
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

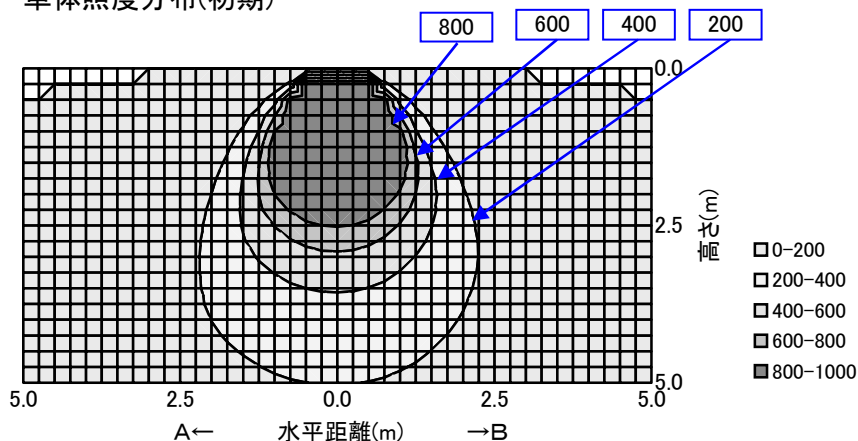

配光曲線

