

日立照明器具 照明特性

形式： HTP5111V-PK14		反 射 率	天井	80%			70%				50%			30%			0%		
ハイスリムe5 〈初期照度補正機能付〉			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
		0.6	0.34	0.27	0.22	0.33	0.26	0.22	0.19	0.26	0.22	0.19	0.25	0.22	0.19	0.18			
		0.8	0.39	0.33	0.28	0.38	0.32	0.28	0.25	0.31	0.28	0.25	0.31	0.27	0.25	0.24			
		1	0.43	0.37	0.32	0.42	0.36	0.32	0.29	0.35	0.32	0.29	0.34	0.31	0.29	0.27			
		1.25	0.46	0.41	0.37	0.45	0.40	0.36	0.33	0.39	0.36	0.33	0.38	0.35	0.33	0.31			
		1.5	0.49	0.44	0.40	0.48	0.43	0.40	0.37	0.42	0.39	0.36	0.41	0.38	0.36	0.35			
		2	0.52	0.48	0.44	0.51	0.47	0.44	0.41	0.46	0.43	0.41	0.45	0.43	0.41	0.39			
		2.5	0.54	0.50	0.47	0.53	0.50	0.47	0.44	0.48	0.46	0.44	0.47	0.45	0.43	0.42			
		3	0.55	0.52	0.49	0.54	0.51	0.49	0.47	0.50	0.48	0.46	0.49	0.47	0.45	0.44			
光 源		4	0.57	0.54	0.52	0.56	0.53	0.51	0.50	0.52	0.51	0.49	0.51	0.50	0.48	0.47			
品名	ハイスリムUV	5	0.58	0.56	0.54	0.57	0.55	0.53	0.52	0.54	0.52	0.51	0.53	0.51	0.50	0.49			
形式	FHF45S・EN-V	7	0.59	0.58	0.56	0.58	0.57	0.56	0.55	0.56	0.55	0.54	0.54	0.54	0.53	0.51			
光束	4,950 lm	10	0.60	0.59	0.58	0.59	0.58	0.58	0.57	0.57	0.56	0.56	0.56	0.55	0.55	0.53			

器具効率 $F_t = 57.1\%$
 上方光束 $F_u = 0.0\%$
 下方光束 $F_d = 57.1\%$


配光分類
BZ-

最大取付間隔
 A-A 1.26 H
 B-B 1.26 H

保守率
 良 0.69
 中 0.65
 否 0.61

光度 (cd/1000 lm)			
	A-0	B-B	C-0
0	205	205	205
10	200	199	202
20	190	190	190
30	171	172	171
40	147	148	147
50	119	119	119
60	86	90	87
70	51	55	52
80	18	22	22
90	1		1
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

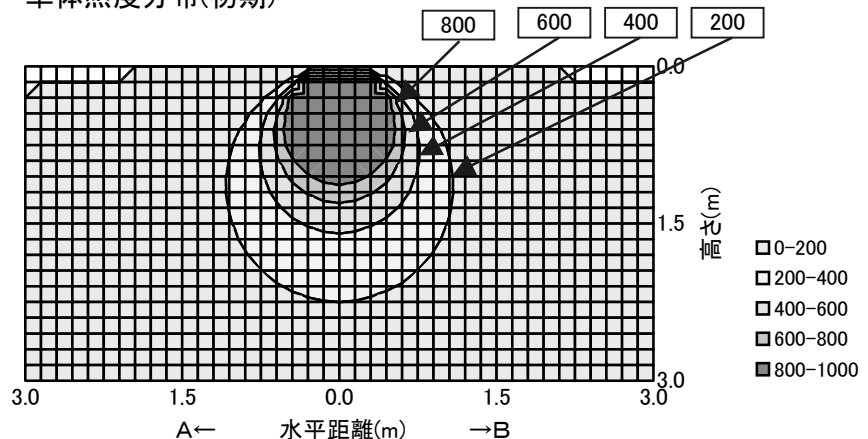

配光曲線

