


日立照明器具 照明特性

形式： HTP5211V-PK14 ハイスリムe5 〈初期照度補正機能付〉	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
	室指数	照明率 S/H=1.0														
	0.6	0.34	0.27	0.23	0.33	0.27	0.23	0.20	0.26	0.22	0.20	0.26	0.22	0.20	0.18	
	0.8	0.40	0.33	0.29	0.39	0.33	0.28	0.25	0.32	0.28	0.25	0.31	0.28	0.25	0.24	
	1	0.43	0.37	0.33	0.42	0.37	0.33	0.30	0.36	0.32	0.29	0.35	0.32	0.29	0.28	
	1.25	0.47	0.41	0.37	0.46	0.41	0.37	0.34	0.40	0.36	0.34	0.39	0.36	0.33	0.32	
	1.5	0.49	0.44	0.41	0.48	0.44	0.40	0.37	0.43	0.40	0.37	0.42	0.39	0.37	0.35	
	2	0.53	0.48	0.45	0.52	0.48	0.45	0.42	0.47	0.44	0.42	0.46	0.43	0.41	0.40	
	2.5	0.54	0.51	0.48	0.54	0.50	0.48	0.45	0.49	0.47	0.45	0.48	0.46	0.44	0.43	
	3	0.56	0.53	0.50	0.55	0.52	0.50	0.47	0.51	0.49	0.47	0.50	0.48	0.46	0.45	
光 源	4	0.57	0.55	0.53	0.57	0.54	0.52	0.51	0.53	0.51	0.50	0.52	0.50	0.49	0.48	
品 名	ハイスリムUV	5	0.59	0.57	0.55	0.58	0.56	0.54	0.53	0.55	0.53	0.52	0.53	0.52	0.51	0.49
形式	FHF45S・EN-V	7	0.60	0.59	0.57	0.59	0.58	0.57	0.55	0.57	0.55	0.55	0.55	0.54	0.54	0.52
光束	9,900 lm	10	0.61	0.60	0.59	0.60	0.59	0.58	0.58	0.58	0.57	0.57	0.57	0.56	0.56	0.54

器具効率 Ft= 57.9%		
上方光束 Fu= 0.0%		
下方光束 Fd= 57.9%		
配光分類		
BZ-		
最大取付間隔		
A-A	1.24	H
B-B	1.24	H
保守率	良	0.69
	中	0.65
	否	0.61
光度 (cd/1000 lm)		
	A-0	B-B C-0
0	209	209 209
10	205	204 205
20	193	192 192
30	174	174 174
40	150	150 151
50	121	122 121
60	85	91 88
70	52	57 58
80	17	17 18
90	1	1
100		
110		
120		
130		
140		
150		
160		
170		
180		

単体照度分布(初期)

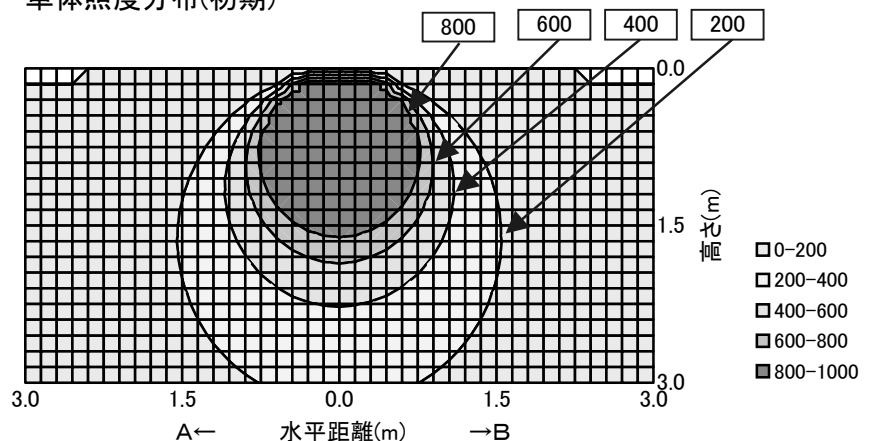

配光曲線

