


日立照明器具 照明特性

形式: HTPS4460-MEN14		天井	80%			70%				50%			30%			0%
<定格出力形>		反射率	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		壁														
		床	10%													
		室指数	照明率 S/H=1.0													
姿図 	光源	0.6	0.33	0.26	0.21	0.32	0.25	0.21	0.18	0.25	0.21	0.18	0.24	0.21	0.18	0.17
		0.8	0.38	0.32	0.27	0.38	0.31	0.27	0.24	0.30	0.26	0.23	0.30	0.26	0.23	0.22
		1	0.42	0.36	0.31	0.41	0.35	0.31	0.28	0.34	0.30	0.27	0.33	0.30	0.27	0.26
		1.25	0.46	0.40	0.35	0.45	0.39	0.35	0.32	0.38	0.34	0.32	0.37	0.34	0.31	0.30
		1.5	0.48	0.43	0.39	0.47	0.42	0.38	0.35	0.41	0.38	0.35	0.40	0.37	0.35	0.33
		2	0.52	0.47	0.44	0.51	0.46	0.43	0.40	0.45	0.42	0.40	0.44	0.42	0.39	0.38
		2.5	0.54	0.50	0.47	0.53	0.49	0.46	0.43	0.48	0.45	0.43	0.47	0.44	0.42	0.41
		3	0.55	0.52	0.49	0.54	0.51	0.48	0.46	0.50	0.47	0.45	0.48	0.46	0.45	0.43
		4	0.57	0.54	0.52	0.56	0.53	0.51	0.49	0.52	0.50	0.48	0.51	0.49	0.48	0.46
品名	Hf蛍光ランプ	5	0.58	0.56	0.54	0.57	0.55	0.53	0.52	0.54	0.52	0.51	0.52	0.51	0.50	0.48
形式	FHF32EX-N-H	7	0.59	0.58	0.56	0.59	0.57	0.56	0.54	0.56	0.55	0.54	0.55	0.54	0.53	0.51
光束	14,080 lm	10	0.61	0.59	0.58	0.60	0.59	0.58	0.57	0.57	0.57	0.56	0.56	0.56	0.55	0.53

器具効率 Ft= 57.8%

上方光束 Fu= 0.0%

下方光束 Fd= 57.8%

配光分類

BZ-

最大取付間隔

A-A 1.30 H


B-B H

保守率	良	0.69
	中	0.65
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	185		
10	182		
20	174		
30	160		
40	142		
50	119		
60	93		
70	63		
80	32		
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

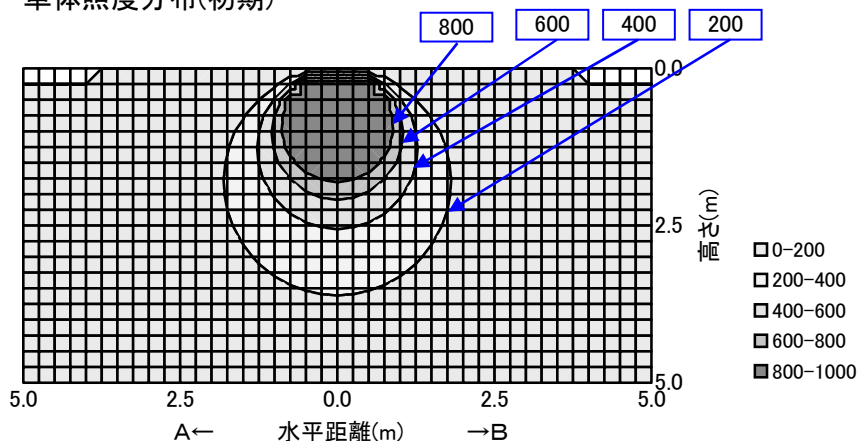

配光曲線

