

日立照明器具 照明特性

形式： HTPS4461-MEN14		反 射 率	天井	80%			70%				50%			30%			0%		
<定格出力形>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図 		0.6	0.40	0.33	0.29	0.39	0.33	0.29	0.26	0.32	0.28	0.26	0.32	0.28	0.26	0.24			
		0.8	0.46	0.40	0.36	0.46	0.40	0.36	0.33	0.39	0.35	0.32	0.38	0.35	0.32	0.31			
		1	0.50	0.45	0.41	0.50	0.44	0.40	0.37	0.43	0.40	0.37	0.42	0.39	0.37	0.36			
		1.25	0.54	0.49	0.45	0.53	0.48	0.45	0.42	0.47	0.44	0.42	0.46	0.44	0.41	0.40			
		1.5	0.57	0.52	0.49	0.56	0.51	0.48	0.46	0.50	0.48	0.45	0.49	0.47	0.45	0.43			
		2	0.60	0.56	0.53	0.59	0.55	0.53	0.50	0.54	0.52	0.50	0.53	0.51	0.49	0.48			
		2.5	0.62	0.58	0.56	0.61	0.58	0.55	0.53	0.57	0.54	0.53	0.55	0.54	0.52	0.51			
		3	0.63	0.60	0.58	0.62	0.59	0.57	0.55	0.58	0.56	0.54	0.57	0.55	0.54	0.52			
光 源		4	0.64	0.62	0.60	0.63	0.61	0.60	0.58	0.60	0.59	0.57	0.59	0.58	0.56	0.55			
品名	HF蛍光ランプ ^o	5	0.65	0.63	0.62	0.64	0.63	0.61	0.60	0.61	0.60	0.59	0.60	0.59	0.58	0.57			
形式	FHF32EX-N-H	7	0.67	0.65	0.64	0.66	0.65	0.64	0.63	0.63	0.62	0.62	0.62	0.61	0.61	0.59			
光束	14,080 lm	10	0.68	0.67	0.66	0.67	0.66	0.65	0.65	0.65	0.64	0.64	0.63	0.63	0.63	0.61			

器具効率 Ft= 63.5%

上方光束 Fu= 0.0%

下方光束 Fd= 63.5%

配光分類

BZ-

最大取付間隔

A-A 1.40 H


B-B 1.22 H

保守率	良	0.69
	中	0.65
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	272	272	272
10	271	267	259
20	264	252	256
30	255	224	238
40	222	176	203
50	130	115	128
60	74	72	73
70	30	30	30
80	5	5	5
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

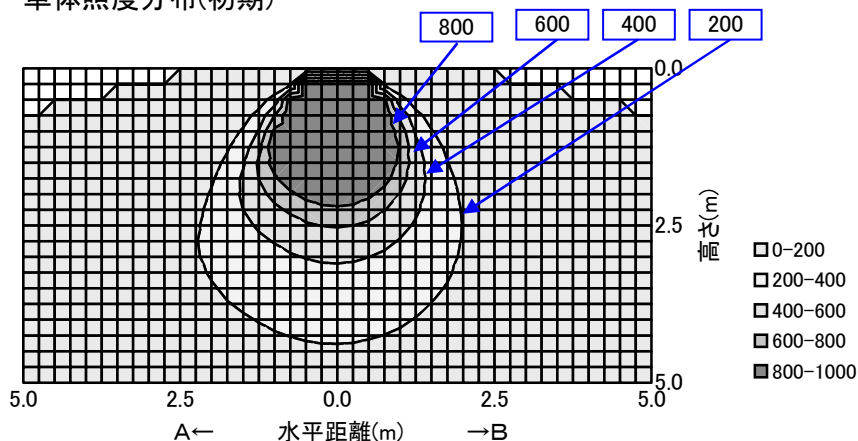

配光曲線

