

日立照明器具 照明特性

形式：LCT5604B		反 射 率	天井	80%			70%				50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図 		0.6	0.50	0.41	0.36	0.49	0.41	0.35	0.32	0.40	0.35	0.31	0.39	0.35	0.31	0.30			
		0.8	0.58	0.50	0.44	0.57	0.49	0.44	0.40	0.48	0.43	0.40	0.47	0.43	0.40	0.38			
		1	0.63	0.55	0.50	0.62	0.55	0.50	0.46	0.54	0.49	0.46	0.52	0.49	0.45	0.44			
		1.25	0.67	0.61	0.56	0.66	0.60	0.55	0.52	0.59	0.55	0.51	0.57	0.54	0.51	0.49			
		1.5	0.70	0.65	0.60	0.69	0.64	0.60	0.56	0.62	0.59	0.56	0.61	0.58	0.55	0.54			
		2	0.74	0.70	0.66	0.73	0.69	0.65	0.62	0.67	0.64	0.62	0.66	0.63	0.61	0.59			
		2.5	0.77	0.73	0.69	0.76	0.72	0.69	0.66	0.70	0.68	0.65	0.69	0.66	0.64	0.63			
		3	0.78	0.75	0.72	0.77	0.74	0.71	0.68	0.72	0.70	0.68	0.71	0.69	0.67	0.65			
光源		4	0.80	0.77	0.75	0.79	0.76	0.74	0.72	0.75	0.73	0.71	0.73	0.72	0.70	0.68			
品名	ミニクリプトン電球	5	0.81	0.79	0.77	0.80	0.78	0.76	0.75	0.77	0.75	0.74	0.75	0.74	0.72	0.70			
形式	KR100/110V45WFR	7	0.83	0.82	0.80	0.82	0.81	0.79	0.78	0.79	0.78	0.77	0.77	0.76	0.75	0.73			
光束	450 lm	10	0.84	0.83	0.82	0.83	0.83	0.82	0.81	0.81	0.80	0.79	0.79	0.79	0.78	0.76			

器具効率 Ft= 79.5%

上方光束 Fu= 0.0%

下方光束 Fd= 79.5%

配光分類

BZ-

最大取付間隔

A-A 1.16 H


B-B H

保守率	良	0.81
	中	0.77
	否	0.67

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	358		
10	348		
20	318		
30	276		
40	228		
50	175		
60	98		
70	38		
80	11		
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

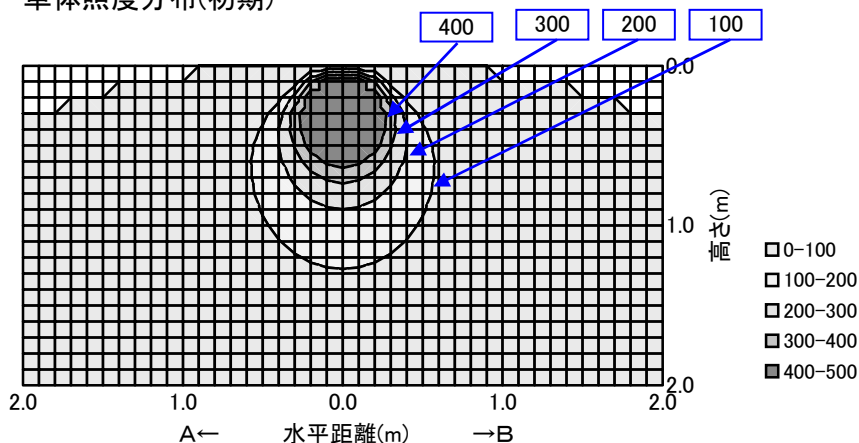

配光曲線

