

日立照明器具 照明特性

形式: LD10101A	反射率	天井	80%			70%				50%			30%			0%
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			10%													0%
			照明率 S/H=1.0													
姿図 	室指数	0.6	0.57	0.51	0.47	0.57	0.51	0.47	0.44	0.50	0.47	0.44	0.49	0.46	0.44	0.43
		0.8	0.64	0.58	0.54	0.63	0.58	0.54	0.51	0.57	0.54	0.51	0.56	0.53	0.51	0.50
		1	0.67	0.62	0.59	0.67	0.62	0.58	0.56	0.61	0.58	0.56	0.60	0.57	0.55	0.54
		1.25	0.71	0.66	0.63	0.70	0.66	0.62	0.60	0.65	0.62	0.60	0.64	0.61	0.59	0.58
		1.5	0.73	0.69	0.66	0.72	0.68	0.66	0.63	0.67	0.65	0.63	0.66	0.64	0.62	0.61
		2	0.76	0.72	0.70	0.75	0.72	0.69	0.67	0.71	0.69	0.67	0.69	0.68	0.66	0.65
		2.5	0.77	0.74	0.72	0.76	0.74	0.72	0.70	0.72	0.71	0.69	0.71	0.70	0.68	0.67
		3	0.78	0.76	0.74	0.77	0.75	0.73	0.71	0.73	0.72	0.70	0.72	0.71	0.70	0.68
		4	0.79	0.77	0.76	0.78	0.77	0.75	0.74	0.75	0.74	0.73	0.74	0.73	0.72	0.70
		5	0.80	0.79	0.77	0.79	0.78	0.76	0.75	0.76	0.75	0.74	0.75	0.74	0.73	0.71
光源																
品名	ミニクリプトン電球															
形式	KR100/110V90WW															
光束	1,430 lm															

器具効率 $F_t = 76.7\%$

上方光束 $F_u = 0.1\%$

下方光束 $F_d = 76.6\%$

配光分類

BZ-

最大取付間隔

A-A 1.00 H


B-B H

保守率	良	0.81
	中	0.77
	否	0.67

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	591		
10	581		
20	499		
30	359		
40	191		
50	93		
60	38		
70	6		
80	4		
90	3		
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

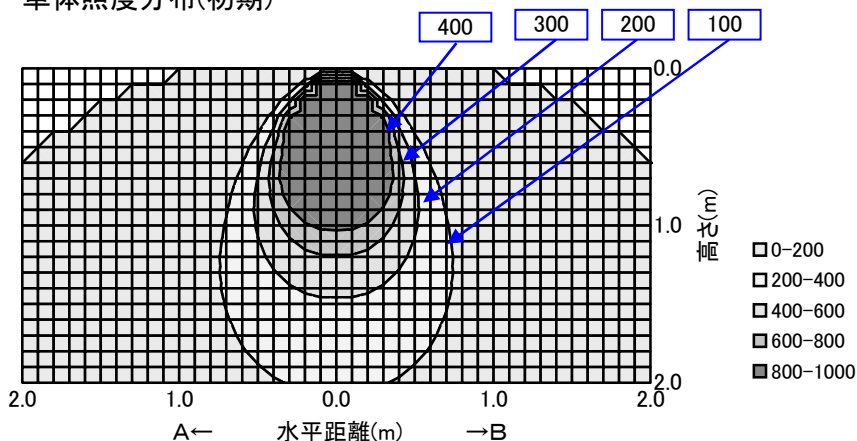

配光曲線

