

日立照明器具 照明特性

形式: LD6101	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
		室指数	照明率 S/H=1.0													
姿図 		0.6	0.58	0.52	0.48	0.58	0.51	0.47	0.45	0.51	0.47	0.44	0.50	0.47	0.44	0.43
		0.8	0.64	0.58	0.54	0.63	0.58	0.54	0.51	0.57	0.53	0.51	0.56	0.53	0.50	0.49
		1	0.68	0.62	0.58	0.67	0.62	0.58	0.55	0.61	0.57	0.55	0.60	0.57	0.54	0.53
		1.25	0.71	0.66	0.62	0.70	0.65	0.62	0.59	0.64	0.61	0.58	0.63	0.60	0.58	0.57
		1.5	0.73	0.69	0.65	0.72	0.68	0.65	0.62	0.67	0.64	0.61	0.65	0.63	0.61	0.59
		2	0.76	0.72	0.69	0.75	0.71	0.69	0.66	0.70	0.68	0.65	0.69	0.67	0.65	0.63
		2.5	0.78	0.74	0.72	0.77	0.73	0.71	0.69	0.72	0.70	0.68	0.70	0.69	0.67	0.65
		3	0.79	0.76	0.73	0.78	0.75	0.72	0.70	0.73	0.71	0.69	0.72	0.70	0.68	0.66
	光源	4	0.80	0.78	0.76	0.79	0.77	0.75	0.73	0.75	0.73	0.72	0.73	0.72	0.71	0.69
	品名 ミニクリプトン電球	5	0.81	0.79	0.77	0.80	0.78	0.76	0.75	0.76	0.75	0.74	0.75	0.73	0.72	0.70
形式	KR100/110V54W	7	0.82	0.81	0.80	0.81	0.80	0.79	0.78	0.78	0.77	0.76	0.76	0.76	0.75	0.72
光束	760 lm	10	0.83	0.82	0.82	0.82	0.82	0.81	0.80	0.80	0.79	0.78	0.78	0.77	0.77	0.74

器具効率 Ft= 78.8%

上方光束 Fu= 0.9%

下方光束 Fd= 77.9%

配光分類

BZ-

最大取付間隔

A-A 0.66 H


B-B H

保守率	良	0.84
	中	0.79
	否	0.70

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	939				
10	772				
20	492				
30	238				
40	163				
50	108				
60	45				
70	16				
80	20				
90	20				
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期)

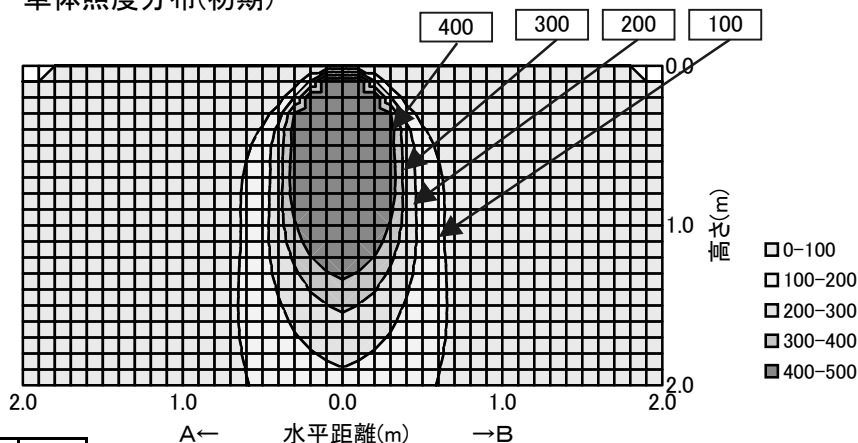

配光曲線

