

日立照明器具 照明特性

形式: LD6101A	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
		室指数	照明率 S/H=1.0													
姿図 	0.6	0.58	0.52	0.48	0.58	0.51	0.47	0.45	0.51	0.47	0.44	0.50	0.47	0.44	0.43	
	0.8	0.64	0.58	0.54	0.63	0.58	0.54	0.51	0.57	0.53	0.51	0.56	0.53	0.50	0.49	
	1	0.68	0.62	0.58	0.67	0.62	0.58	0.55	0.61	0.57	0.55	0.60	0.57	0.54	0.53	
	1.25	0.71	0.66	0.62	0.70	0.65	0.62	0.59	0.64	0.61	0.58	0.63	0.60	0.58	0.57	
	1.5	0.73	0.69	0.65	0.72	0.68	0.65	0.62	0.67	0.64	0.61	0.65	0.63	0.61	0.59	
	2	0.76	0.72	0.69	0.75	0.71	0.69	0.66	0.70	0.68	0.65	0.69	0.67	0.65	0.63	
	2.5	0.78	0.74	0.72	0.77	0.73	0.71	0.69	0.72	0.70	0.68	0.70	0.69	0.67	0.65	
	3	0.79	0.76	0.73	0.78	0.75	0.72	0.70	0.73	0.71	0.69	0.72	0.70	0.68	0.66	
光源	4	0.80	0.78	0.76	0.79	0.77	0.75	0.73	0.75	0.73	0.72	0.73	0.72	0.71	0.69	
品名 ミニクリプトン電球	5	0.81	0.79	0.77	0.80	0.78	0.76	0.75	0.76	0.75	0.74	0.75	0.73	0.72	0.70	
形式 KR100/110V54W	7	0.82	0.81	0.80	0.81	0.80	0.79	0.78	0.78	0.77	0.76	0.76	0.76	0.75	0.72	
光束 760 lm	10	0.83	0.82	0.82	0.82	0.82	0.81	0.80	0.80	0.79	0.78	0.78	0.77	0.77	0.74	

器具効率 $F_t = 78.8\%$

上方光束 $F_u = 0.9\%$

下方光束 $F_d = 77.9\%$

配光分類

BZ-

最大取付間隔

A-A 0.66 H


B-B H

保守率	良	0.81
	中	0.77
	否	0.67

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	939		
10	772		
20	492		
30	238		
40	163		
50	108		
60	45		
70	16		
80	20		
90	20		
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

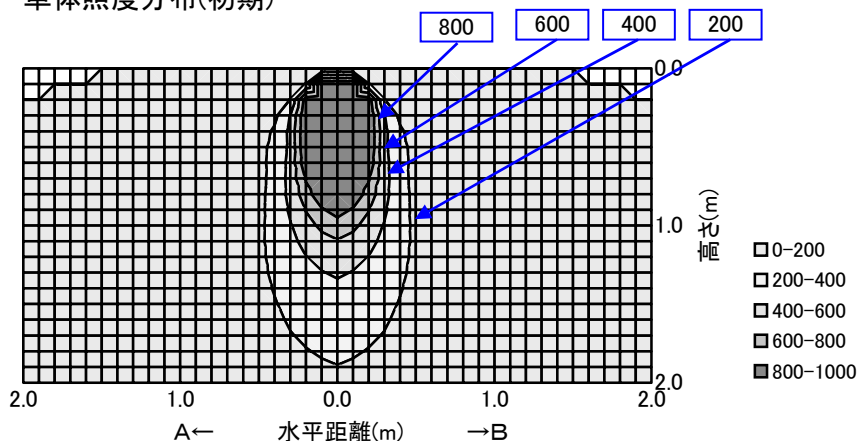

配光曲線

