

日立照明器具 照明特性

形式：LD6121A		反 射 率	天井	80%			70%				50%			30%			0%	
姿図 			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
光源		0.6	0.50	0.44	0.41	0.49	0.44	0.41	0.38	0.44	0.40	0.38	0.43	0.40	0.38	0.37		
		0.8	0.55	0.51	0.47	0.55	0.50	0.47	0.45	0.50	0.47	0.45	0.49	0.46	0.44	0.43		
		1	0.59	0.54	0.51	0.58	0.54	0.51	0.49	0.53	0.51	0.48	0.52	0.50	0.48	0.47		
		1.25	0.62	0.58	0.55	0.61	0.57	0.54	0.52	0.56	0.54	0.52	0.55	0.53	0.52	0.50		
		1.5	0.64	0.60	0.57	0.63	0.60	0.57	0.55	0.59	0.56	0.55	0.58	0.56	0.54	0.53		
品名 ミニクリプトン電球		2	0.66	0.63	0.61	0.65	0.63	0.61	0.59	0.61	0.60	0.58	0.60	0.59	0.58	0.56		
		2.5	0.67	0.65	0.63	0.66	0.64	0.62	0.61	0.63	0.61	0.60	0.62	0.61	0.59	0.58		
		3	0.68	0.66	0.64	0.67	0.65	0.64	0.62	0.64	0.63	0.61	0.63	0.62	0.60	0.59		
		4	0.69	0.67	0.66	0.68	0.67	0.65	0.64	0.65	0.64	0.63	0.64	0.63	0.62	0.61		
		5	0.70	0.68	0.67	0.69	0.68	0.67	0.66	0.66	0.65	0.65	0.65	0.64	0.64	0.62		
形式 KR100/110V54W		7	0.71	0.70	0.69	0.70	0.69	0.68	0.68	0.68	0.67	0.67	0.67	0.66	0.65	0.64		
		10	0.72	0.71	0.71	0.71	0.70	0.70	0.69	0.69	0.69	0.68	0.68	0.67	0.67	0.65		
光束 760 lm																		

器具効率 $F_t = 67.0\%$

上方光束 $F_u = 0.2\%$

下方光束 $F_d = 66.8\%$

配光分類

BZ-

最大取付間隔

A-A 1.08 H


B-B H

保守率	良	0.74
	中	0.70
	否	0.62

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	472		
10	479		
20	435		
30	323		
40	186		
50	73		
60	22		
70	6		
80	6		
90	4		
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

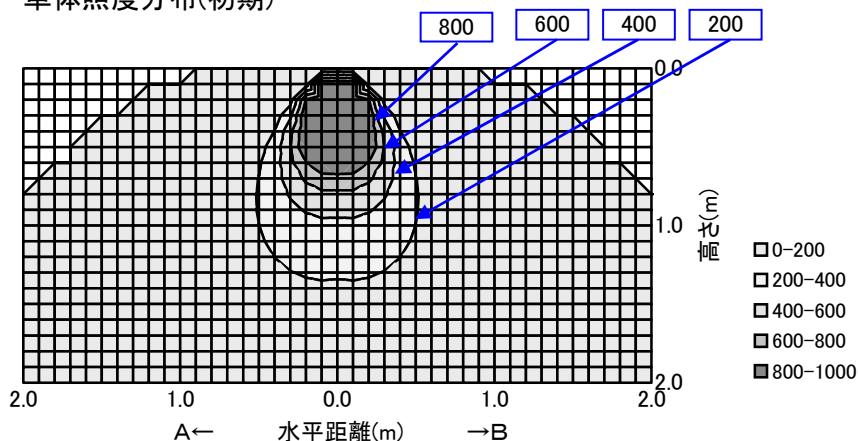

配光曲線

