

日立照明器具 照明特性

形式：LD6122A		反 射 率	天井	80%			70%				50%			30%			0%		
姿図 			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
光源		0.6	0.32	0.27	0.24	0.32	0.27	0.24	0.22	0.27	0.24	0.22	0.26	0.23	0.22	0.21			
		0.8	0.37	0.32	0.29	0.36	0.32	0.29	0.27	0.31	0.29	0.27	0.31	0.28	0.26	0.26			
		1	0.40	0.36	0.32	0.39	0.35	0.32	0.30	0.34	0.32	0.30	0.34	0.32	0.30	0.29			
		1.25	0.42	0.39	0.36	0.42	0.38	0.35	0.33	0.37	0.35	0.33	0.37	0.34	0.33	0.32			
		1.5	0.44	0.41	0.38	0.44	0.40	0.38	0.36	0.39	0.37	0.35	0.39	0.37	0.35	0.34			
品名 ミニクリプトン電球		2	0.47	0.44	0.41	0.46	0.43	0.41	0.39	0.42	0.40	0.39	0.41	0.40	0.38	0.37			
		2.5	0.48	0.45	0.43	0.47	0.45	0.43	0.41	0.44	0.42	0.41	0.43	0.42	0.40	0.39			
		3	0.49	0.46	0.45	0.48	0.46	0.44	0.43	0.45	0.43	0.42	0.44	0.43	0.42	0.40			
		4	0.50	0.48	0.47	0.49	0.48	0.46	0.45	0.46	0.45	0.44	0.45	0.44	0.43	0.42			
		5	0.51	0.49	0.48	0.50	0.49	0.47	0.46	0.48	0.47	0.46	0.47	0.46	0.45	0.44			
形式 KR100/110V54W		7	0.52	0.51	0.50	0.51	0.50	0.49	0.48	0.49	0.48	0.48	0.48	0.47	0.47	0.45			
		10	0.52	0.52	0.51	0.52	0.51	0.51	0.50	0.50	0.50	0.49	0.49	0.49	0.48	0.47			
光束 760 lm																			

器具効率 $F_t = 49.5\%$

上方光束 $F_u = 0.2\%$

下方光束 $F_d = 49.3\%$

配光分類

BZ-

最大取付間隔

A-A 1.22 H


B-B H

保守率	良	0.81
	中	0.77
	否	0.67

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	242		
10	241		
20	224		
30	198		
40	148		
50	77		
60	41		
70	25		
80	13		
90	4		
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

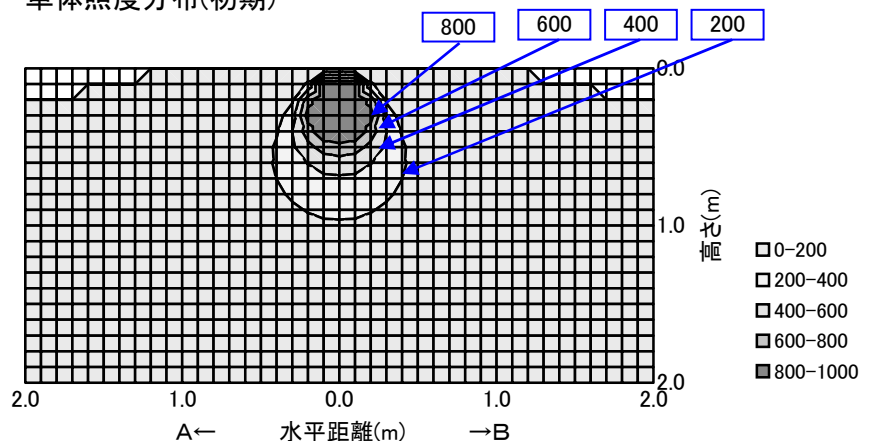

配光曲線

