


日立照明器具 照明特性

形式：LDE1103WN		反 射 率	天井	80%			70%				50%			30%			0%	
<高出力タイプ> <昼白色(5000K,Ra70)> <埋込穴φ100タイプ>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
		0.6	0.70	0.60	0.54	0.69	0.60	0.54	0.50	0.59	0.54	0.50	0.58	0.53	0.50	0.48		
		0.8	0.79	0.71	0.65	0.78	0.70	0.65	0.61	0.69	0.64	0.61	0.68	0.64	0.60	0.59		
		1	0.85	0.78	0.72	0.84	0.77	0.72	0.68	0.76	0.71	0.68	0.74	0.70	0.67	0.66		
		1.25	0.90	0.83	0.78	0.89	0.83	0.78	0.74	0.81	0.77	0.74	0.80	0.76	0.73	0.72		
		1.5	0.93	0.88	0.83	0.92	0.87	0.83	0.79	0.85	0.82	0.79	0.84	0.81	0.78	0.76		
		2	0.97	0.93	0.89	0.96	0.92	0.89	0.86	0.90	0.87	0.85	0.89	0.86	0.84	0.82		
		2.5	1.00	0.96	0.92	0.98	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.89	0.87	0.85		
		3	1.01	0.98	0.95	1.00	0.97	0.94	0.91	0.95	0.92	0.90	0.93	0.91	0.89	0.87		
光 源		4	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.90		
品名	LED6.7W	5	1.04	1.02	1.00	1.03	1.01	0.99	0.97	0.99	0.97	0.96	0.97	0.96	0.95	0.92		
形式		7	1.06	1.04	1.03	1.05	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.99	0.98	0.95		
光束	550 lm	10	1.07	1.07	1.06	1.06	1.05	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	0.98		

器具効率 Ft= 100.0%
 上方光束 Fu= 0.0%
 下方光束 Fd= 100.0%

配光分類

BZ-

最大取付間隔

A-A 1.30 H


B-B H

保守率
 良 0.75
 中 0.71
 否 0.67

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	532		
10	536		
20	532		
30	463		
40	361		
50	147		
60	45		
70	13		
80	2		
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

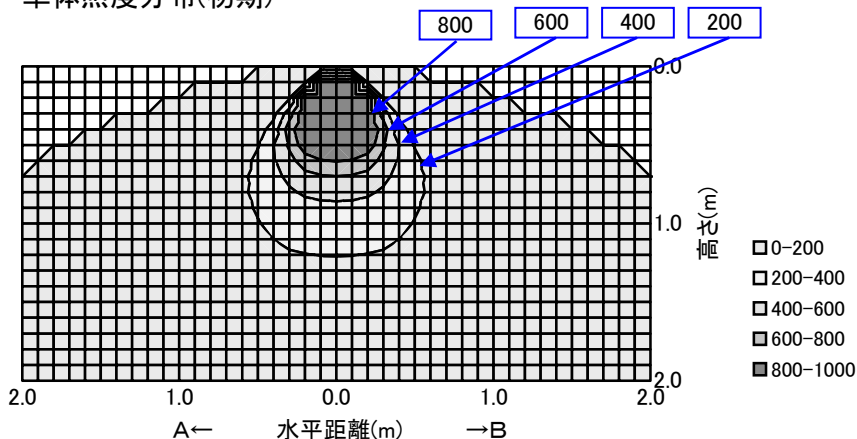

配光曲線

