



日立照明器具 照明特性

形式：LDE2201WL		反 射 率	天井	80%			70%				50%			30%			0%		
<高演色タイプ> <電球色(3000K,Ra92)> <埋込穴Φ125>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図 		0.6	0.66	0.56	0.50	0.65	0.56	0.50	0.45	0.55	0.49	0.45	0.54	0.49	0.45	0.43			
		0.8	0.76	0.67	0.61	0.75	0.66	0.61	0.56	0.65	0.60	0.56	0.64	0.59	0.56	0.54			
		1	0.82	0.74	0.68	0.81	0.73	0.68	0.64	0.72	0.67	0.63	0.71	0.66	0.63	0.61			
		1.25	0.87	0.80	0.75	0.86	0.79	0.74	0.70	0.78	0.74	0.70	0.77	0.73	0.69	0.68			
		1.5	0.91	0.85	0.80	0.90	0.84	0.79	0.76	0.82	0.78	0.75	0.81	0.77	0.75	0.73			
		2	0.96	0.91	0.87	0.94	0.90	0.86	0.83	0.88	0.85	0.82	0.86	0.84	0.81	0.79			
		2.5	0.98	0.94	0.90	0.97	0.93	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.85	0.83			
		3	1.00	0.96	0.93	0.98	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.89	0.87	0.85			
光源		4	1.02	0.99	0.96	1.01	0.98	0.95	0.93	0.96	0.94	0.92	0.94	0.92	0.91	0.88			
品名 形式 光束	LED12.4W	5	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.94	0.93	0.91			
		7	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.97	0.94			
	600 lm	10	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.00	1.00	0.99	0.97			

器具効率 Ft= 100.0%		
上方光束 Fu= 0.0%		
下方光束 Fd= 100.0%		
配光分類		
BZ-		
最大取付間隔		
A-A	1.24	H
B-B		H
保守率	良	0.71
	中	0.68
	否	0.64
光度 (cd/1000 lm)		
	A-0	B-B
0	504	
10	491	
20	464	
30	417	
40	326	
50	190	
60	82	
70	21	
80	4	
90		
100		
110		
120		
130		
140		
150		
160		
170		
180		

単体照度分布(初期)

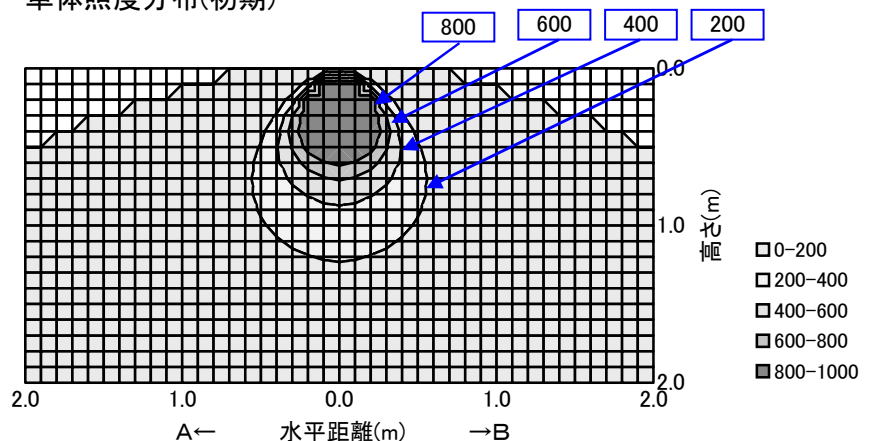

配光曲線

