

日立照明器具 照明特性

形式: LDE2203WN <昼白色(5,000K,Ra75)> <埋込穴Φ125>		天井	80%			70%				50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		反射率	床	10%														0%
			室指数	照明率 S/H=1.0														

姿図		0.6	0.67	0.57	0.50	0.66	0.56	0.50	0.46	0.55	0.50	0.46	0.54	0.49	0.45	0.44
		0.8	0.76	0.67	0.61	0.75	0.67	0.61	0.57	0.66	0.60	0.57	0.65	0.60	0.56	0.55
		1	0.83	0.75	0.69	0.81	0.74	0.68	0.64	0.72	0.68	0.64	0.71	0.67	0.63	0.62
		1.25	0.88	0.81	0.75	0.86	0.80	0.75	0.71	0.78	0.74	0.70	0.77	0.73	0.70	0.68
		1.5	0.91	0.85	0.80	0.90	0.84	0.80	0.76	0.83	0.79	0.75	0.81	0.78	0.75	0.73
		2	0.96	0.91	0.87	0.95	0.90	0.86	0.83	0.88	0.85	0.82	0.87	0.84	0.81	0.79
		2.5	0.98	0.94	0.90	0.97	0.93	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.85	0.83
		3	1.00	0.96	0.93	0.98	0.95	0.92	0.89	0.93	0.91	0.88	0.91	0.89	0.87	0.85
		4	1.02	0.99	0.96	1.01	0.98	0.95	0.93	0.96	0.94	0.92	0.94	0.92	0.91	0.88
		5	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.96	0.94	0.93	0.91
品名 LED12.3W 形式 光束 1,090 lm		7	1.05	1.04	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.97	0.94
		10	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.00	1.00	0.99	0.97


器具効率 Ft= 100.0%	
上方光束 Fu= 0.0%	
下方光束 Fd= 100.0%	
最大取付間隔	
A-A	1.26 H
B-B	H
保守率	光源寿命 (h) 40,00060,000 良0.770.71 中0.730.67 否0.640.59

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	494				
10	490				
20	469				
30	419				
40	341				
50	196				
60	60				
70	19				
80	8				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

单体照度分布(初期)

配光曲线

単体照度分布(初期)

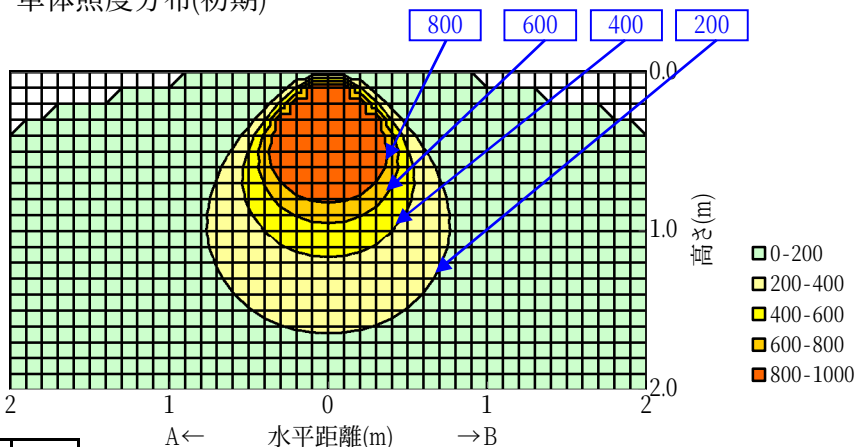

配光曲線

