
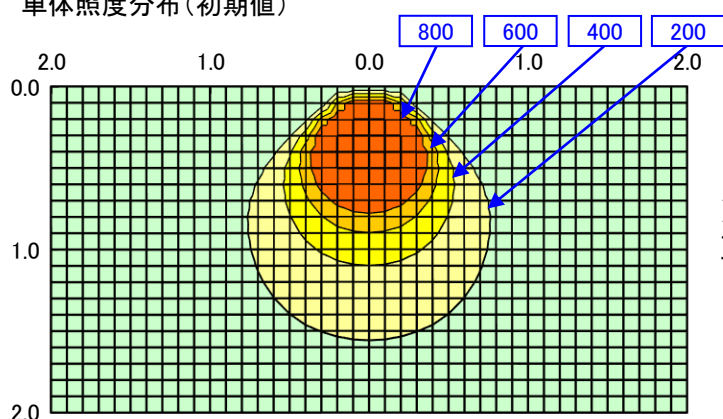
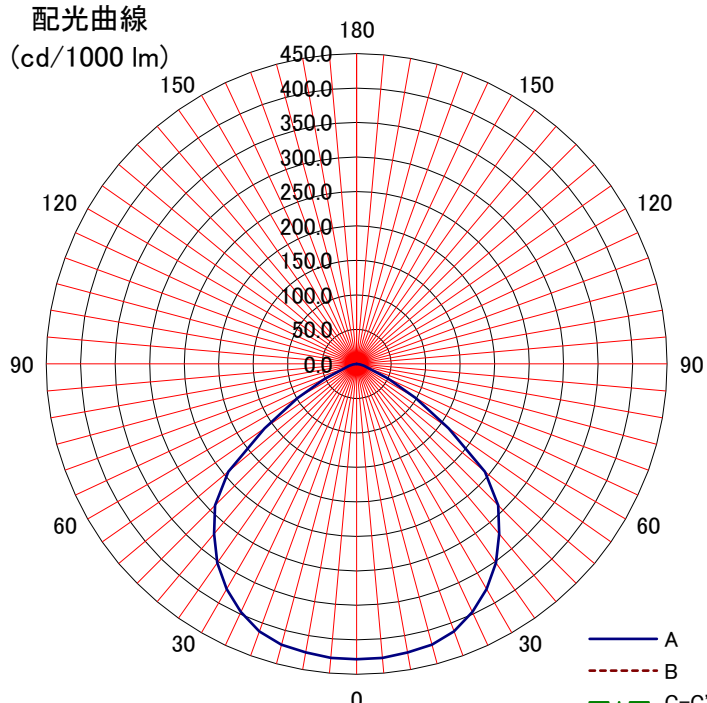


日立照明器具 照明特性

名称: LEDダウンライト	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
形式: LDE2204WN	室指数	床	10%													0%
		固有照明率 S/H=1.0														
＜備考＞	0.6	0.64	0.53	0.46	0.62	0.52	0.46	0.41	0.51	0.45	0.41	0.50	0.45	0.41	0.39	
	0.8	0.74	0.64	0.58	0.73	0.64	0.57	0.53	0.62	0.57	0.52	0.61	0.56	0.52	0.50	
姿図 	1	0.80	0.72	0.65	0.79	0.71	0.65	0.61	0.70	0.64	0.60	0.68	0.64	0.60	0.58	
	1.25	0.86	0.78	0.73	0.85	0.78	0.72	0.68	0.76	0.71	0.67	0.74	0.70	0.67	0.65	
	1.5	0.90	0.83	0.78	0.89	0.82	0.77	0.73	0.81	0.76	0.73	0.79	0.75	0.72	0.70	
	2	0.95	0.89	0.85	0.94	0.89	0.84	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.77	
	2.5	0.98	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.86	0.83	0.81	
	3	0.99	0.95	0.92	0.98	0.94	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.84	
光源形式	4	1.01	0.98	0.95	1.00	0.97	0.95	0.92	0.95	0.93	0.91	0.93	0.91	0.90	0.87	
	5	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.96	0.94	0.95	0.94	0.92	0.90	
器具光束 1,130 lm	7	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93	
	10	1.07	1.06	1.04	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	1.00	0.99	0.96	
器具効率 Ft= 100%		単体照度分布(初期値)  0-200 200-400 400-600 600-800 800-1000														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.30 H B-B H																
保守率	良	0.79														
	中	0.75														
	否	0.67														
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm)  A B C-C'														
	A-0	B-B	C-0	A'-0	C'-0											
0	428															
10	425															
20	412															
30	377															
40	321															
50	243															
60	99															
70	19															
80	5															
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																