

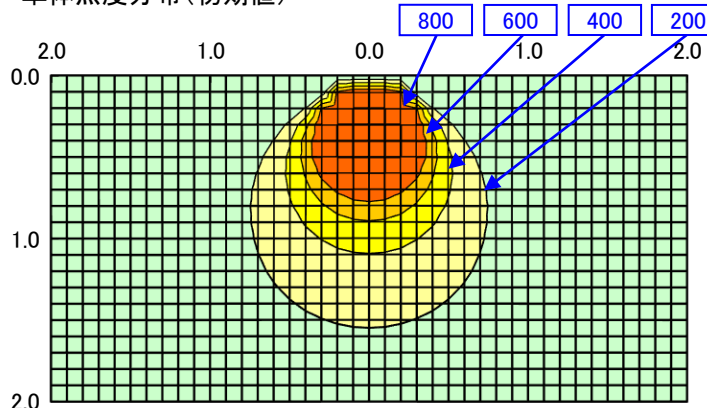


日立照明器具 照明特性

名称: LEDダウンライト	反射率	天井	80%				70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
形式: LDE2304WN	室指数	固有照明率 S/H=1.0															
＜備考＞	0.6	0.63	0.52	0.45	0.62	0.51	0.45	0.40	0.50	0.44	0.40	0.49	0.44	0.40	0.38		
	0.8	0.73	0.63	0.56	0.72	0.62	0.56	0.51	0.61	0.55	0.51	0.60	0.55	0.51	0.49		
姿図 	1	0.80	0.71	0.64	0.78	0.70	0.64	0.59	0.68	0.63	0.59	0.67	0.62	0.58	0.56		
	1.25	0.85	0.77	0.71	0.84	0.76	0.71	0.66	0.75	0.70	0.66	0.73	0.69	0.65	0.63		
	1.5	0.89	0.82	0.77	0.88	0.82	0.76	0.72	0.80	0.75	0.72	0.78	0.74	0.71	0.69		
	2	0.94	0.89	0.84	0.93	0.88	0.84	0.80	0.86	0.82	0.79	0.84	0.81	0.78	0.76		
	2.5	0.97	0.92	0.88	0.96	0.91	0.88	0.84	0.90	0.86	0.84	0.88	0.85	0.83	0.80		
	3	0.99	0.95	0.91	0.98	0.94	0.90	0.88	0.92	0.89	0.86	0.90	0.88	0.85	0.83		
	4	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.89	0.87		
光源形式	5	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.90		
器具光束 1,140 lm	7	1.05	1.03	1.01	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93		
	10	1.07	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.01	1.00	0.99	0.99	0.96		
器具効率 Ft= 100%		単体照度分布(初期値) 															
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔																	
A-A 1.28 H																	
B-B H																	
保守率	良	0.79															
	中	0.75															
	否	0.67															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	420																
10	415																
20	398																
30	363																
40	306																
50	234																
60	133																
70	23																
80	3																
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	

配光曲線 (cd/1000 lm)					
					
A B C-C'					

配光曲線
(cd/1000 lm)

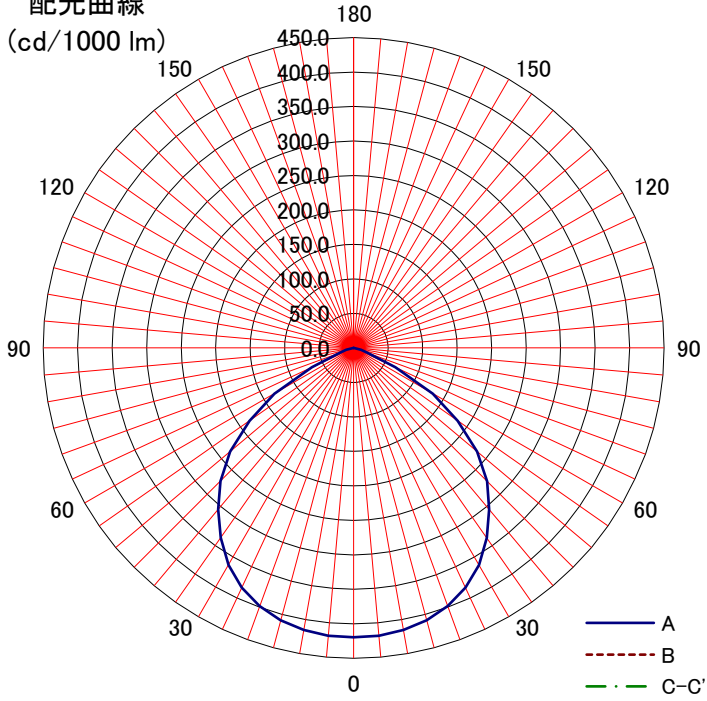